

SIRGAWAIN

User manual English




Model: IS7

Support:
clock.sirgawain@gmail.com



Product Parameters

- Video Resolution: 4K/2K/1080p/720P, 25fps
- Video format: ASF compress H.264.
- Minimal illumination: 1LUX.
- Power Supply: 240mA/3.7V
- Memory Care: TF maximum 128G.
- Video play software: VLCPlayer/SMPlayer.
- Support: Android/IOS/Windows/Mac OS X.
- Battery Capacity: 2600mA.
- Motion Detective: 6m.
- Voice Record Area: 5m.
- Working Time: 9 hours.
- Charging Time: 4 hours.

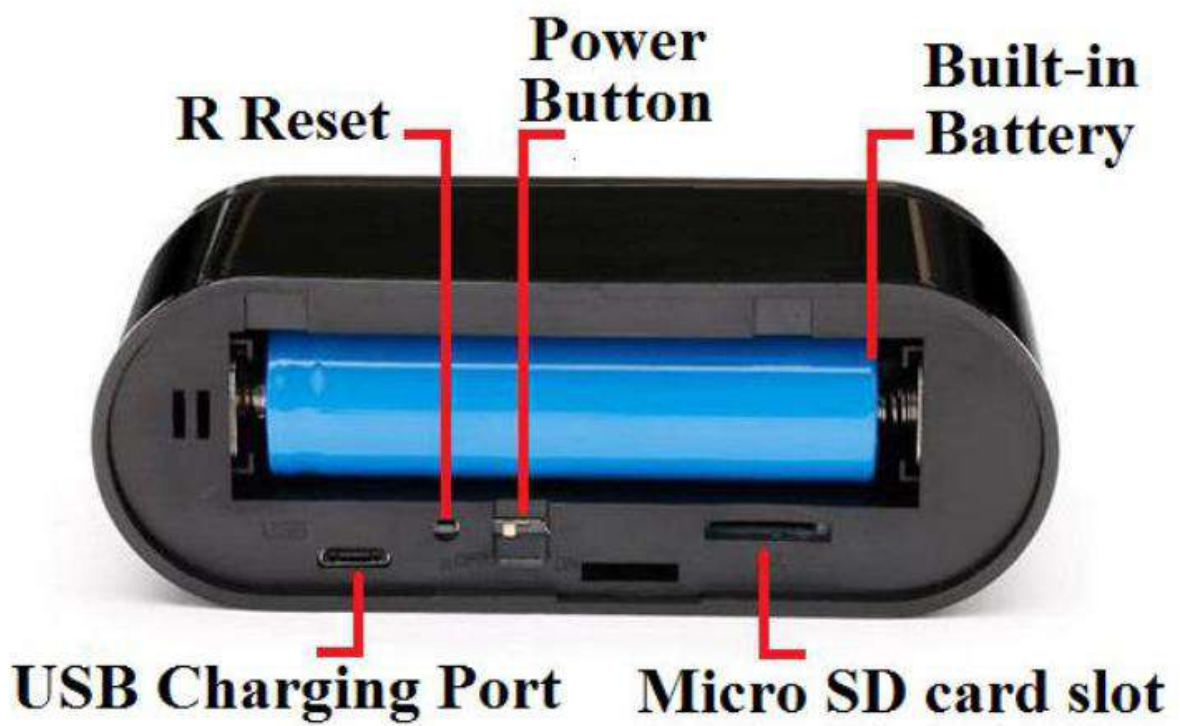

1. **Before first use, we advise you to charge the device for at least 2 hours.**
2. **Remove the back cover.**
3. **Insert the Micro SD card into the SD card slot.**
4. **Turn on the camera by sliding the switch to ON.**
5. **Red LED Indicator:** means that the camera is turned ON.
6. **Blue LED Indicator:** flashes in the Wi-Fi connection mode to a router line.



APP Software Download

1. For Android users, please search for **HMiniCam** on Google Play, then download and install the app on your phone.

For Apple users, please search for **HMiniCam** in the APP Store, then download and install it.

2. Scan the QR code directly to go to the download page. Select appropriate download software according to your mobile phone system.





- 1. Adjust the brightness.**
- 2. Adjust the contrast.**
- 3. Turn on the night vision.**
- 4. No mode.**
- 5. Adjust pixels.**
 - 720p.
 - 1080p.
 - 2K.
 - 4K.
- 6. No mode.**
- 7. No mode.**
- 8. Take photo.**
- 9. Record Video.**
 - A. Screen left and right.**
 - B. Screen up down.**



Android - Page 8.



iPhone - Page 27.



Windows - Page 40.



Mac OS X - Page 47.


Android

Ways of connection


Way 1: Connect directly by Point to Point when the Smartphone is close to the camera.




1. Open HDMiniCam.

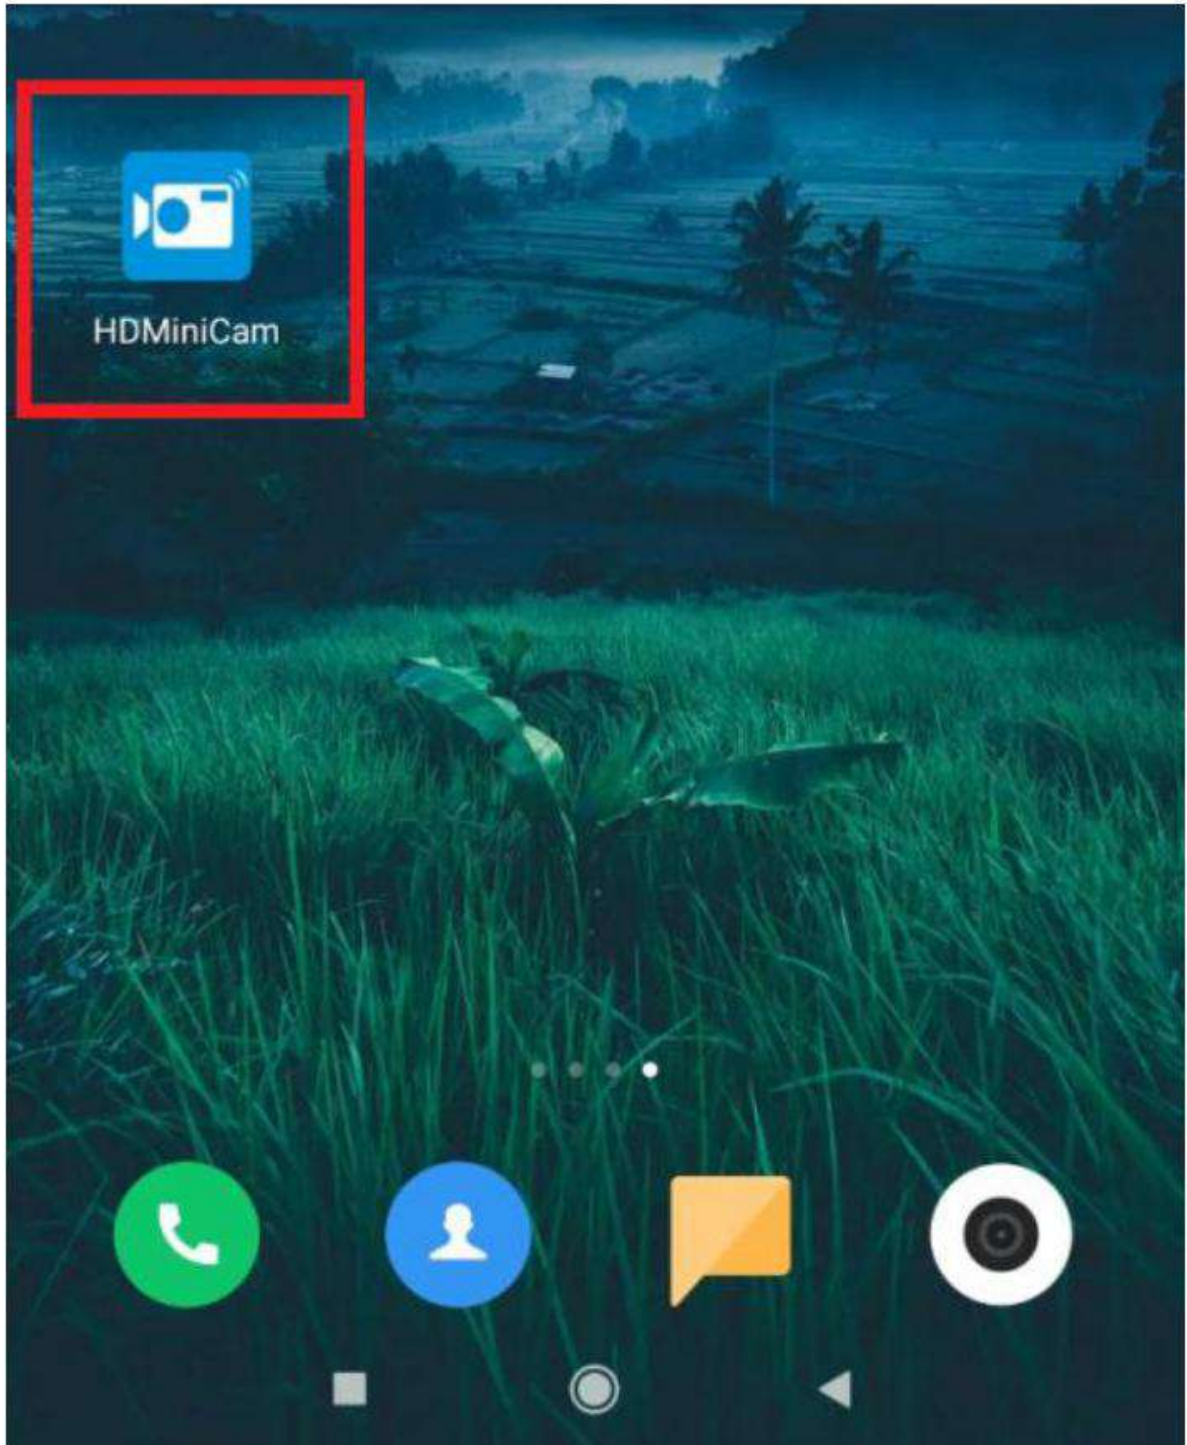

2. Click “Add”.

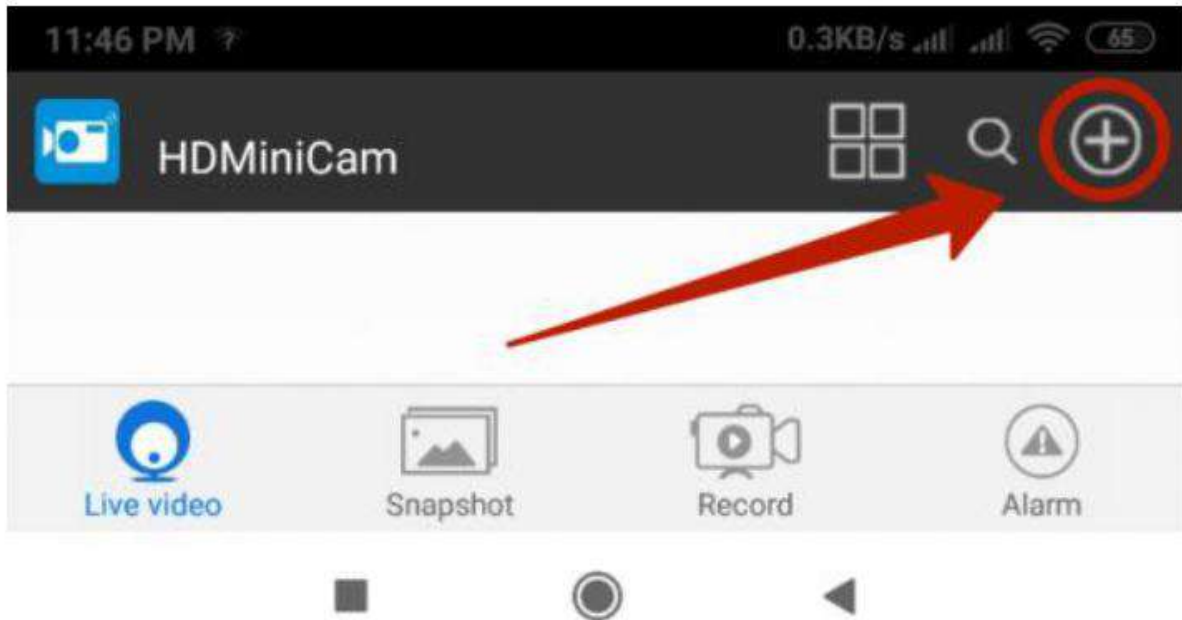

3. Choose The First Option.

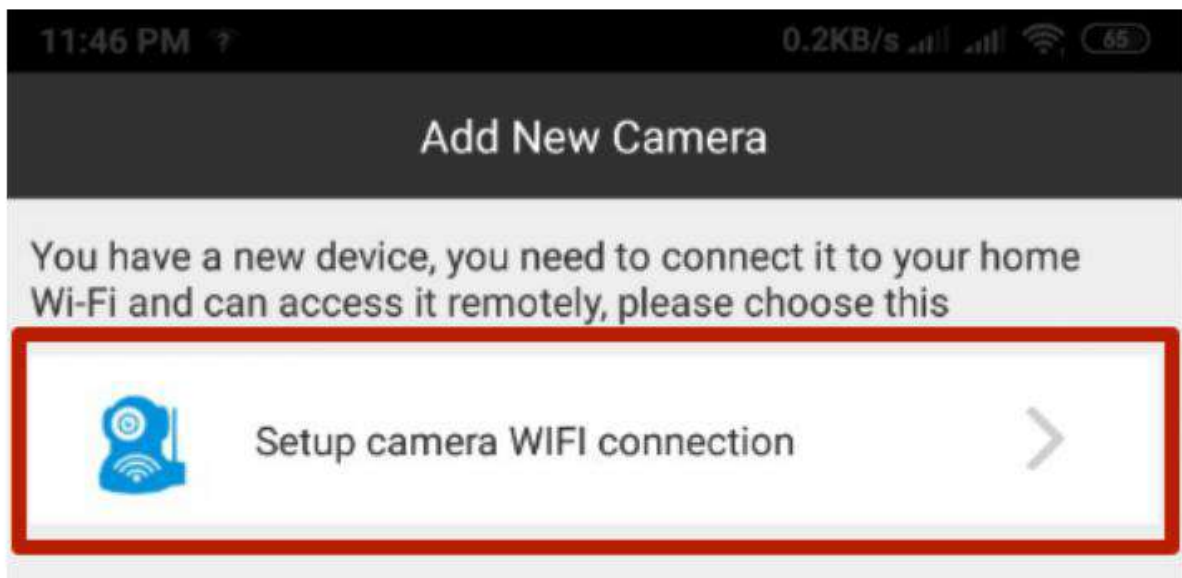

4. Click "OK".

11:46 PM 0.2KB/s

Setup Camera WIFI

Step 1. Power on the camera, then go to "Settings" on your device. Tap on Wi-Fi, then connect the network same as camera UID, as below. If you can not find the WiFi network same as camera UID, Please reset the camera and wait until the camera restarts, and then search for Wifi signal. (If your router releases 2.4 and 5.0GHz dual Wi-Fi, please select 2.4GHz only.)


WLAN

AVAILABLE NETWORKS

- XXXXXX-XXXXXXXX-XXXXXX
Connected (no Internet access)
- ESNTD
Saved, encrypted (good quality)
- ESNTD_5G
Saved, encrypted (available)
- ChinaNet-YHZL
Encrypted

OK


5. Link up to the camera and click option “Back”.

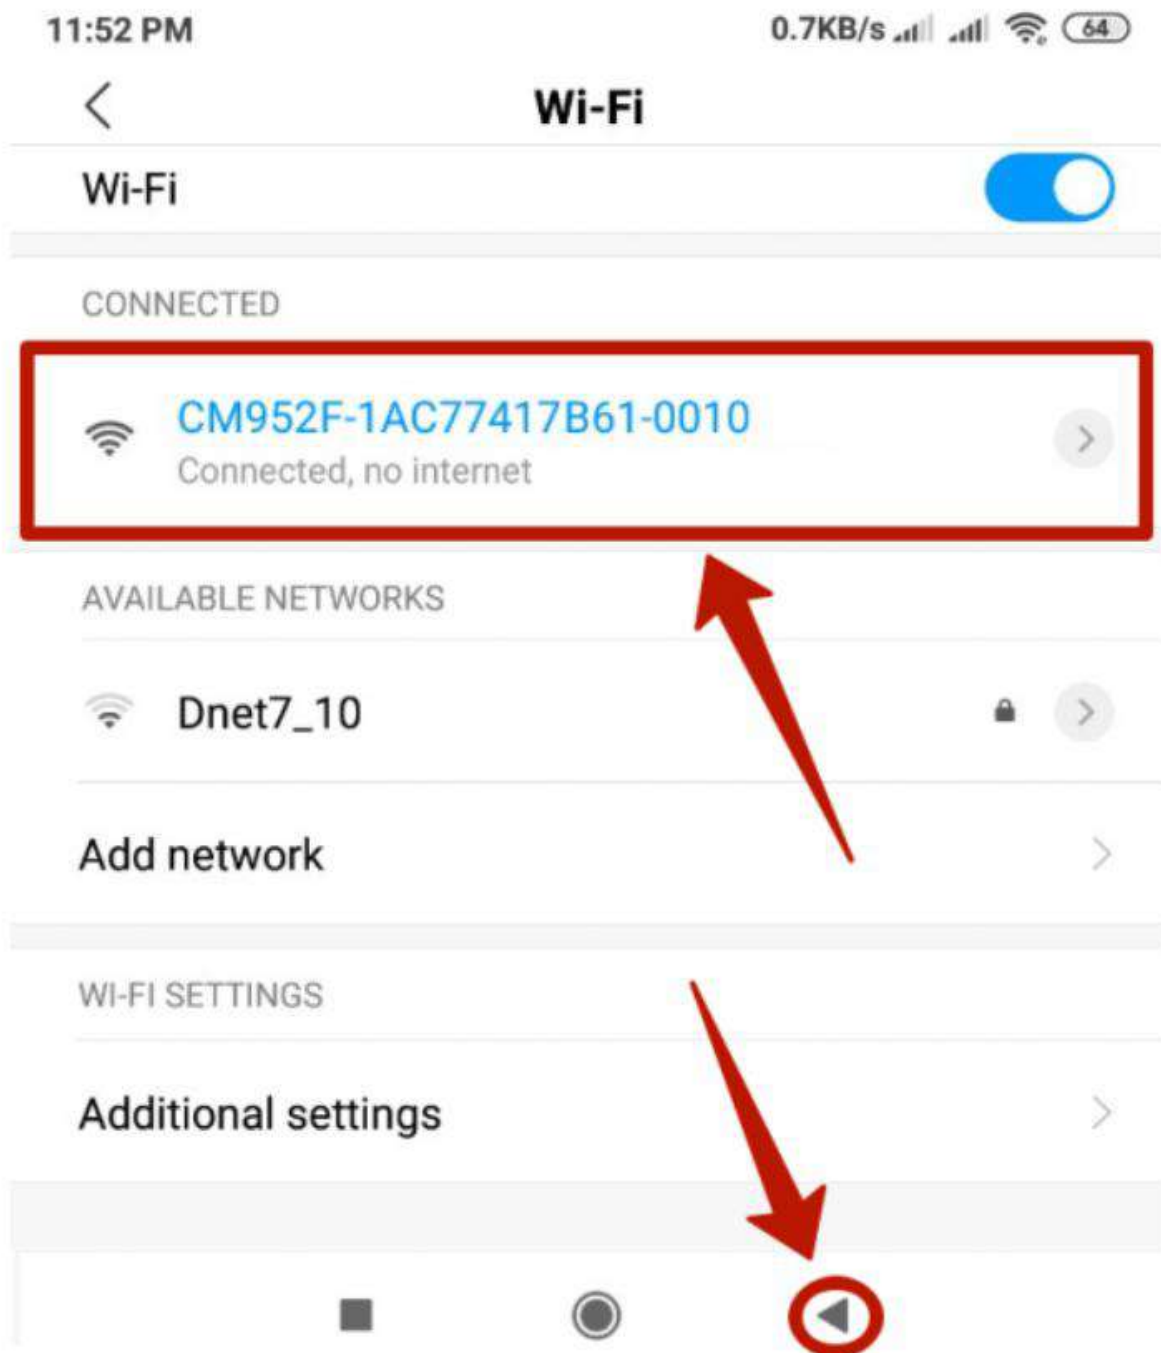


1. Click “**Configuring**”
2. Click option “**Back**”.



7. Click on the camera.

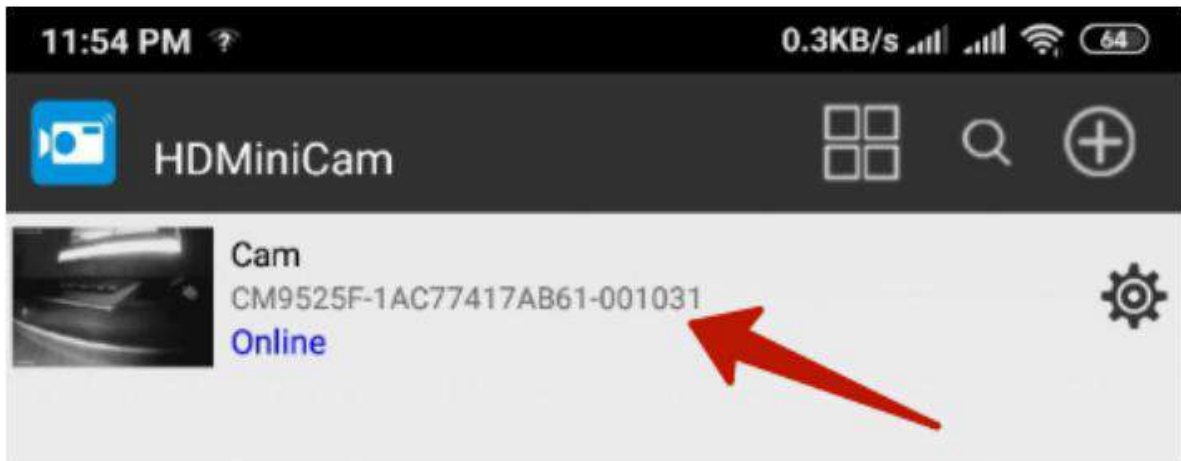

8. Click "Skip".

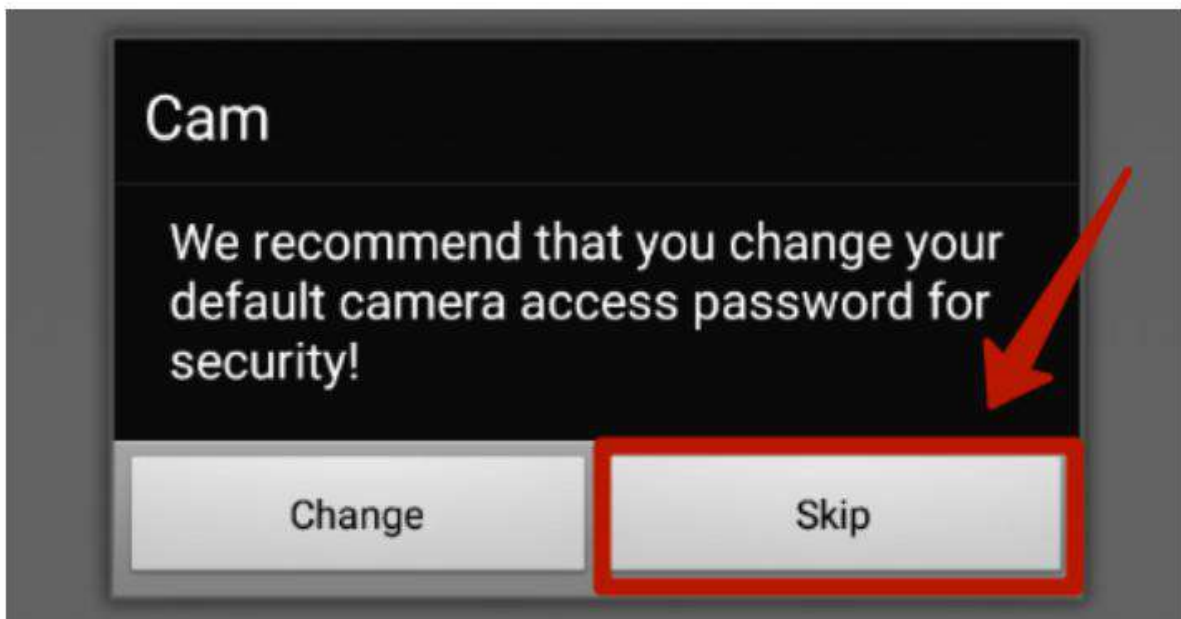


The camera is successfully configured!

Ways of connection


Way 2: Connect camera to Wireless Router to view real-time video anywhere.




1. Go to the settings.

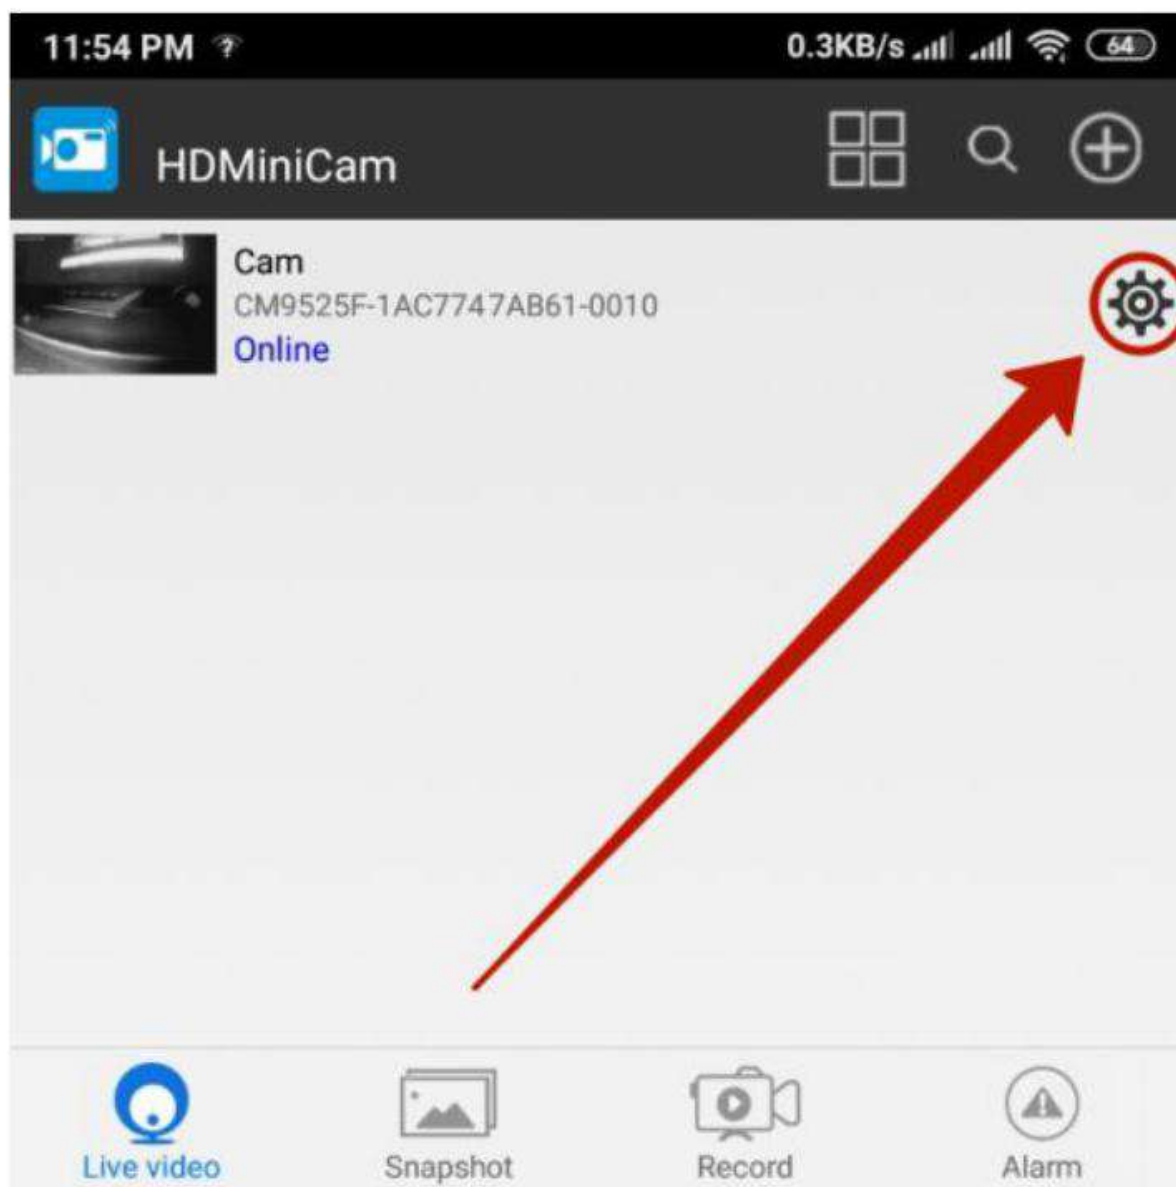


2. Click "Advance Config".

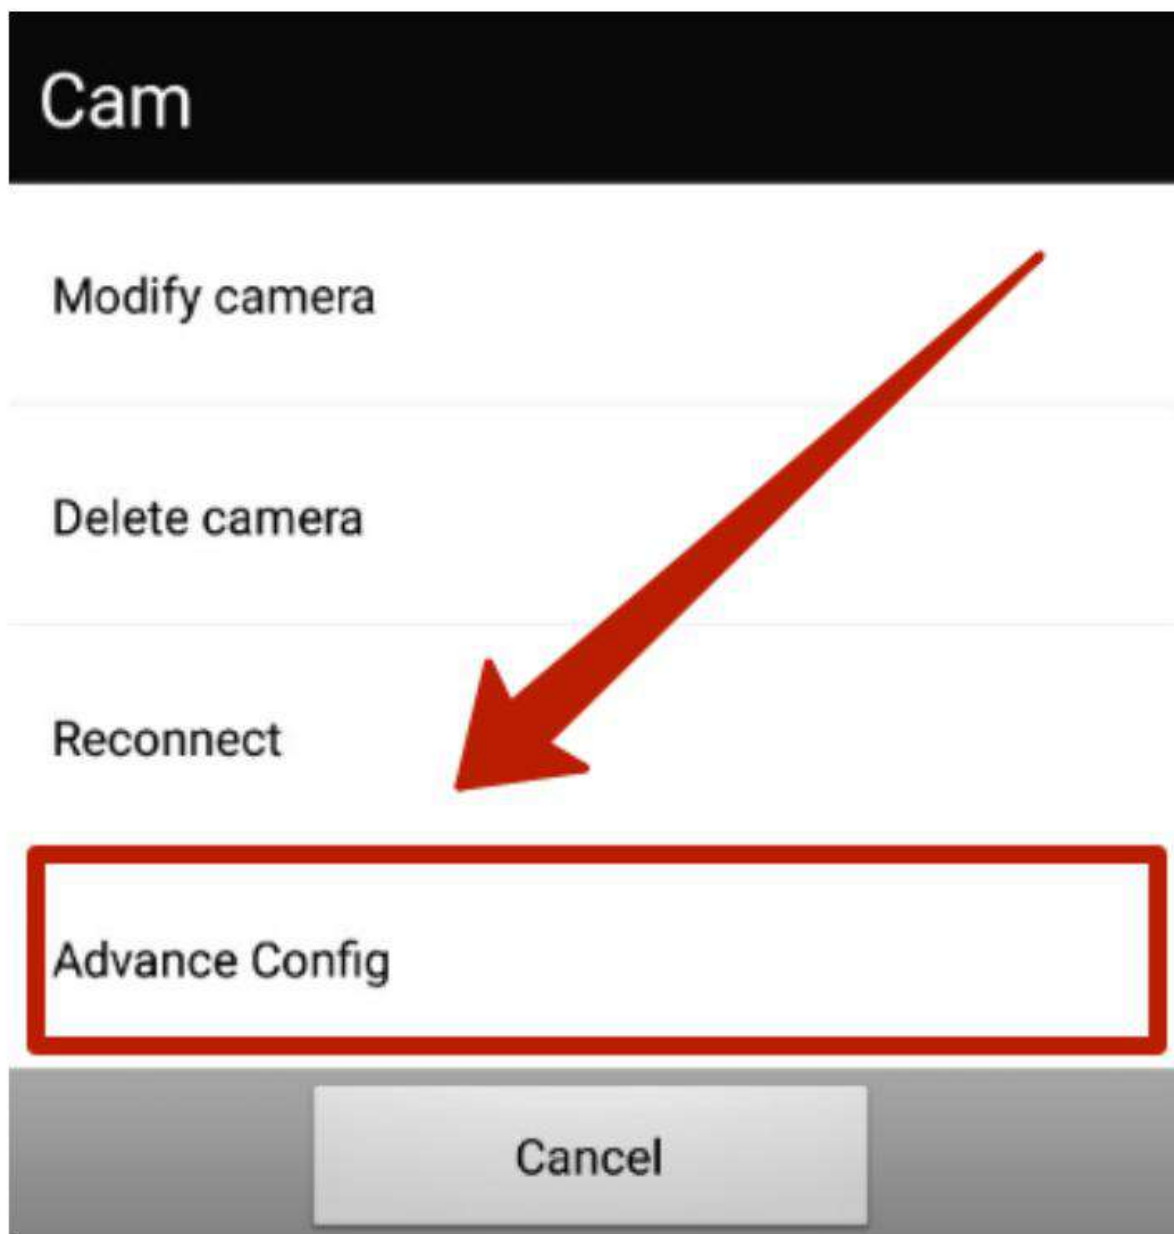


3. Click "Wi-Fi Config".

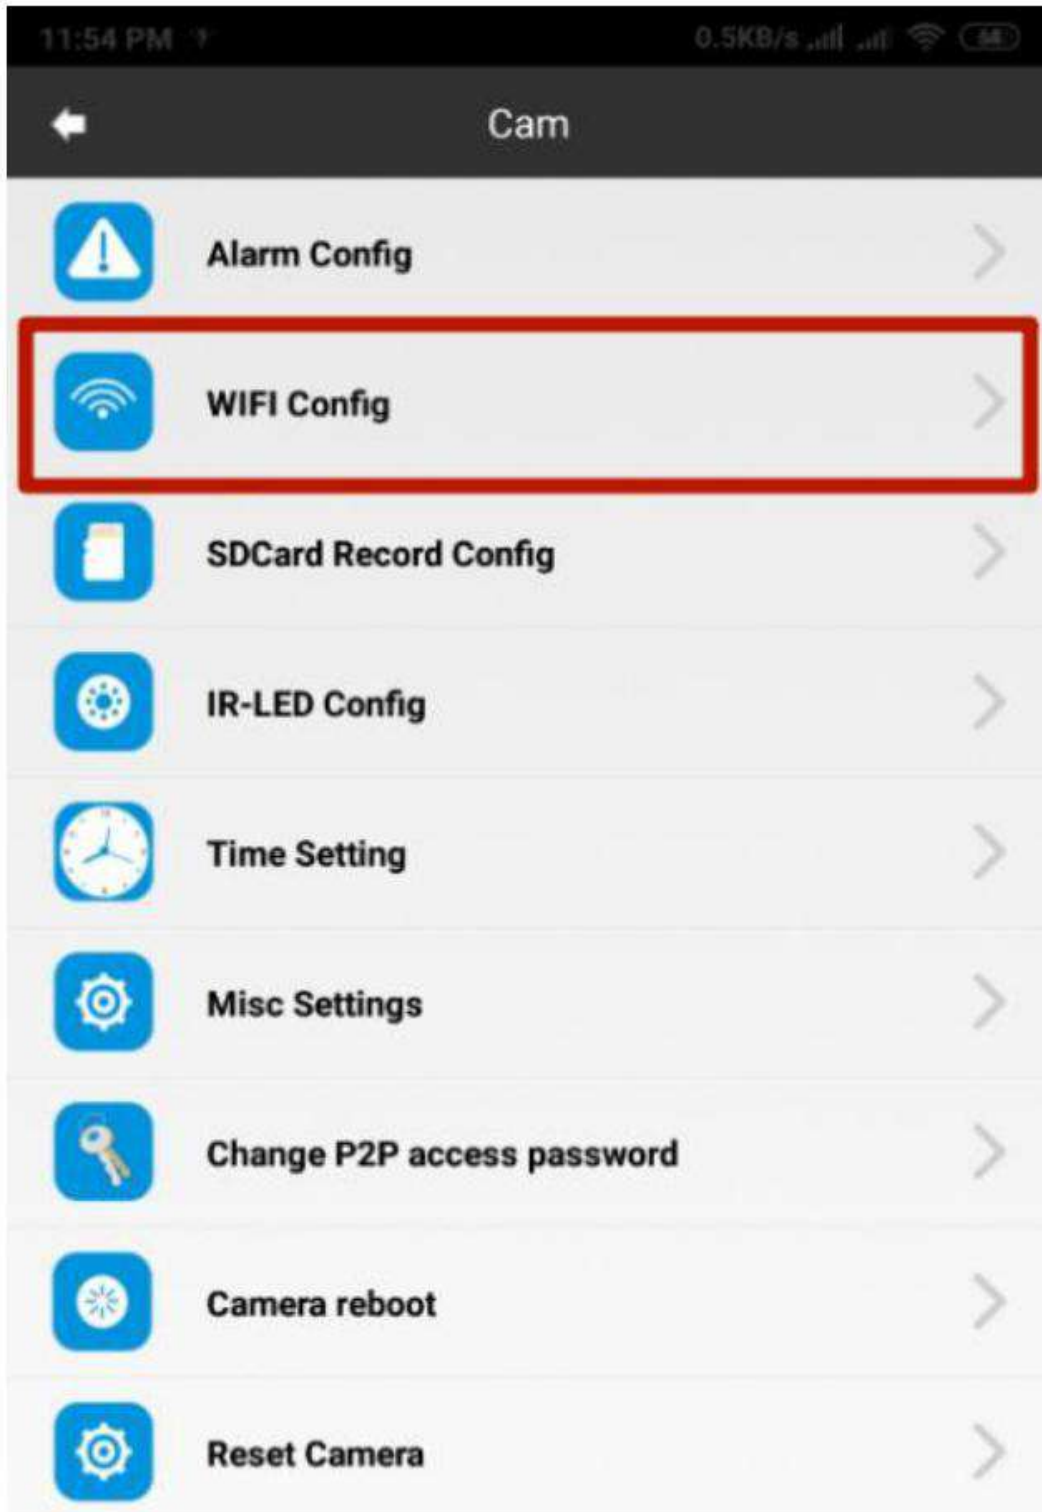

4. Choose your Wi-Fi Router from the list.

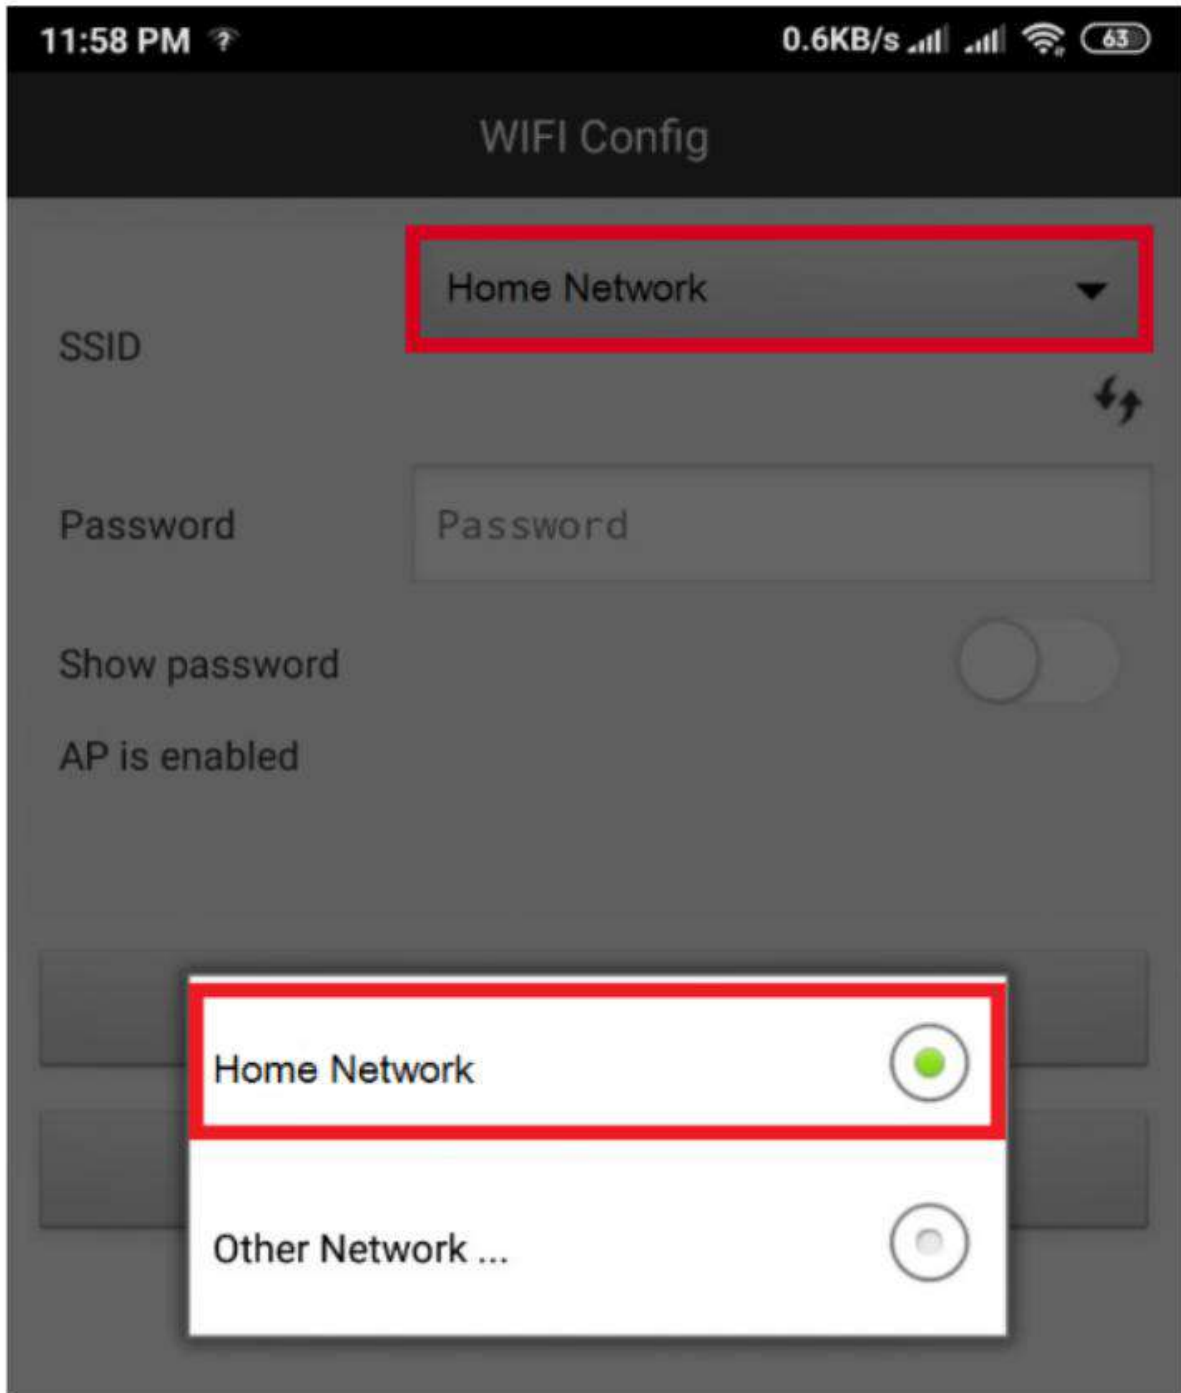


5. Enter your router password.

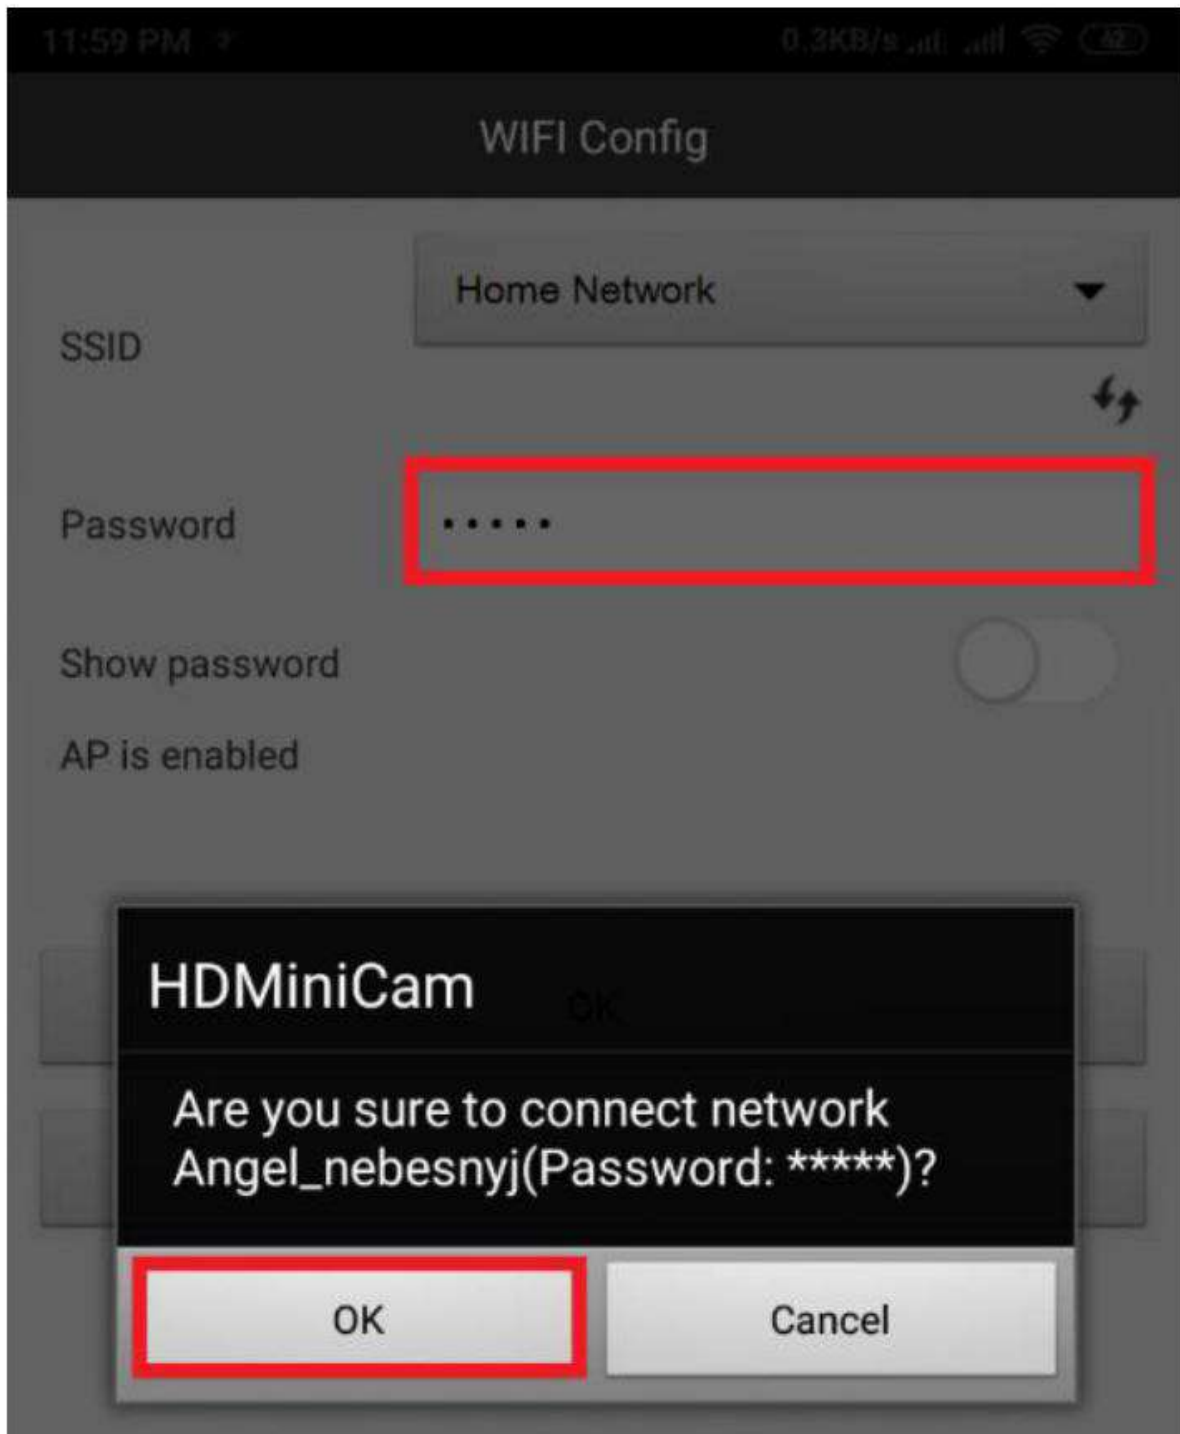


6. Turn off the camera by sliding the switch to OFF on the back panel of the watch. Then turn it ON again. You have restarted the camera! After that, wait for 5-10 minutes until the camera is set up and then connect to the mobile Internet of your phone for remote access.


SETTINGS

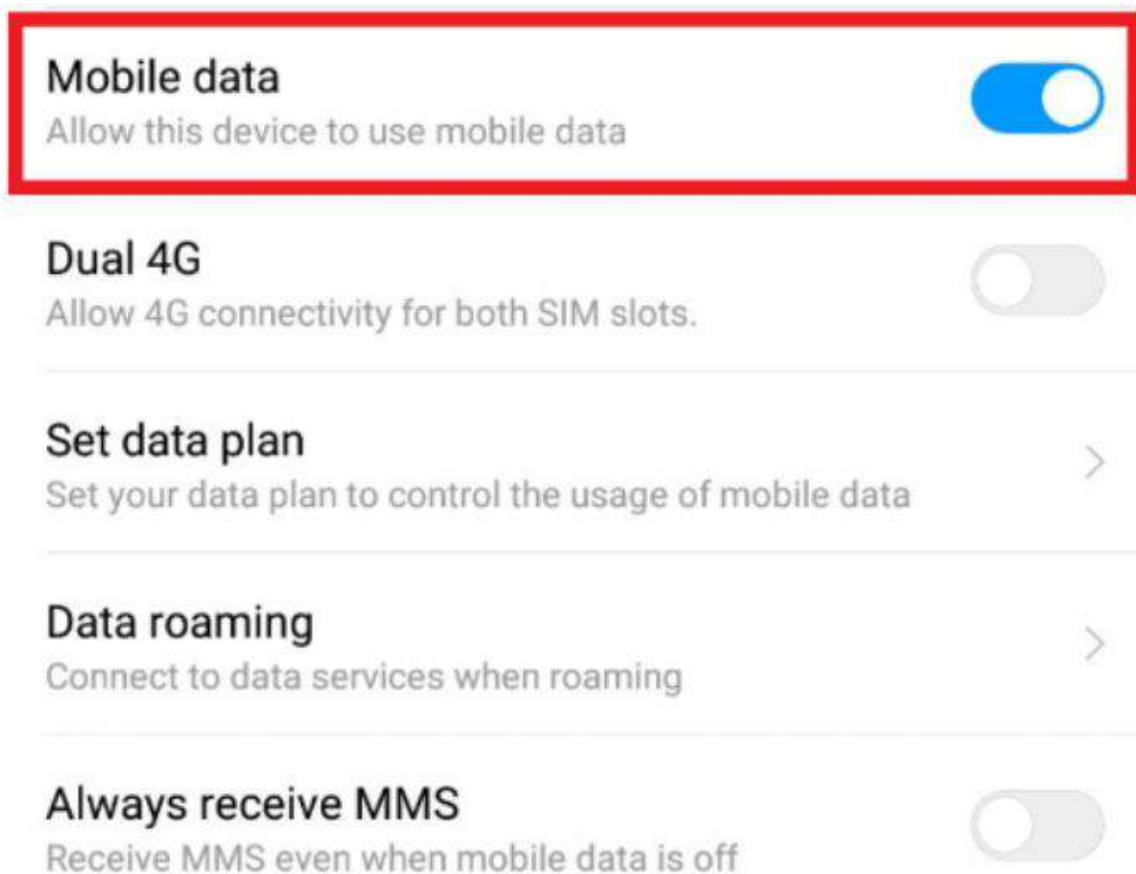

7. If you have done everything correctly, then Cam Online will be displayed again in the HDMiniCam program.

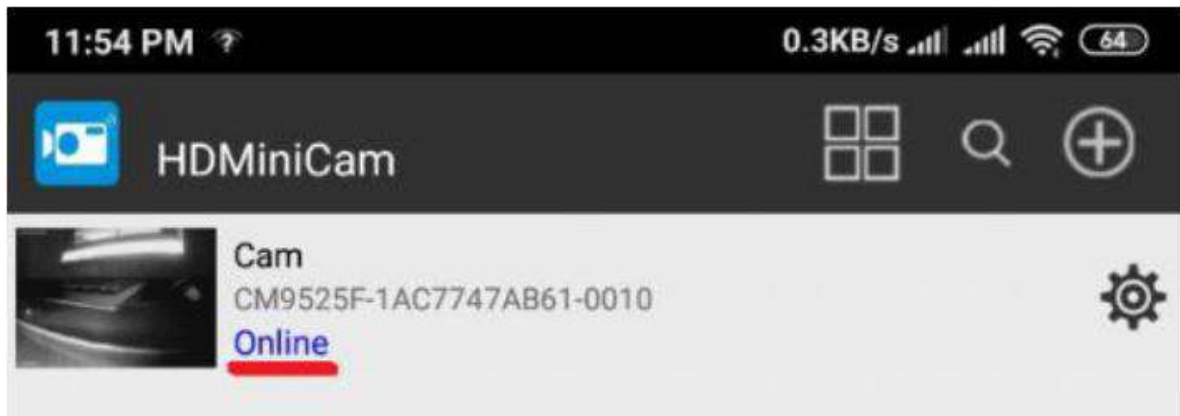

8. Open the camera. The connection will link up within a few minutes.

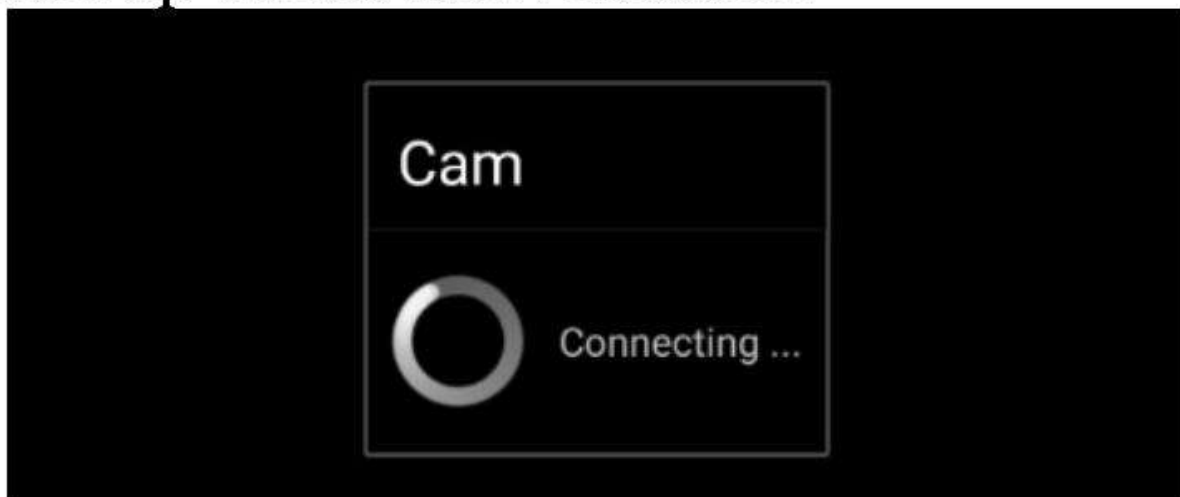

Camera Successfully Configured!


NightVision

1. Activation in manual mode is shown in the image below.




2. Activation of Night Vision in auto mode.

Advance Config / IR-LED Config.

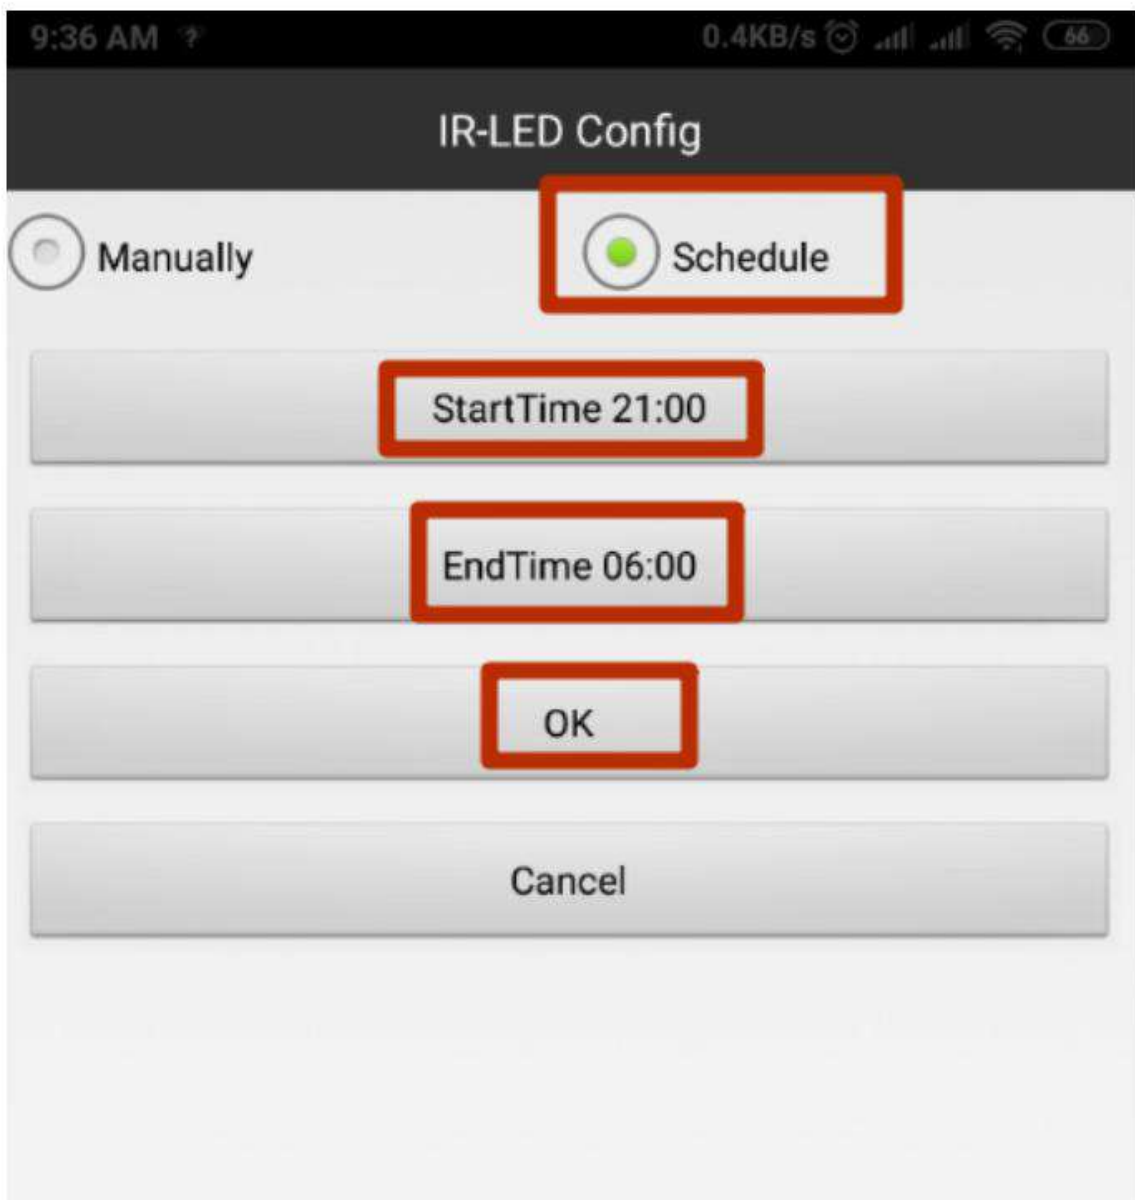

Motion Sensor And Alert


1. Advance Config / Alarm Config.

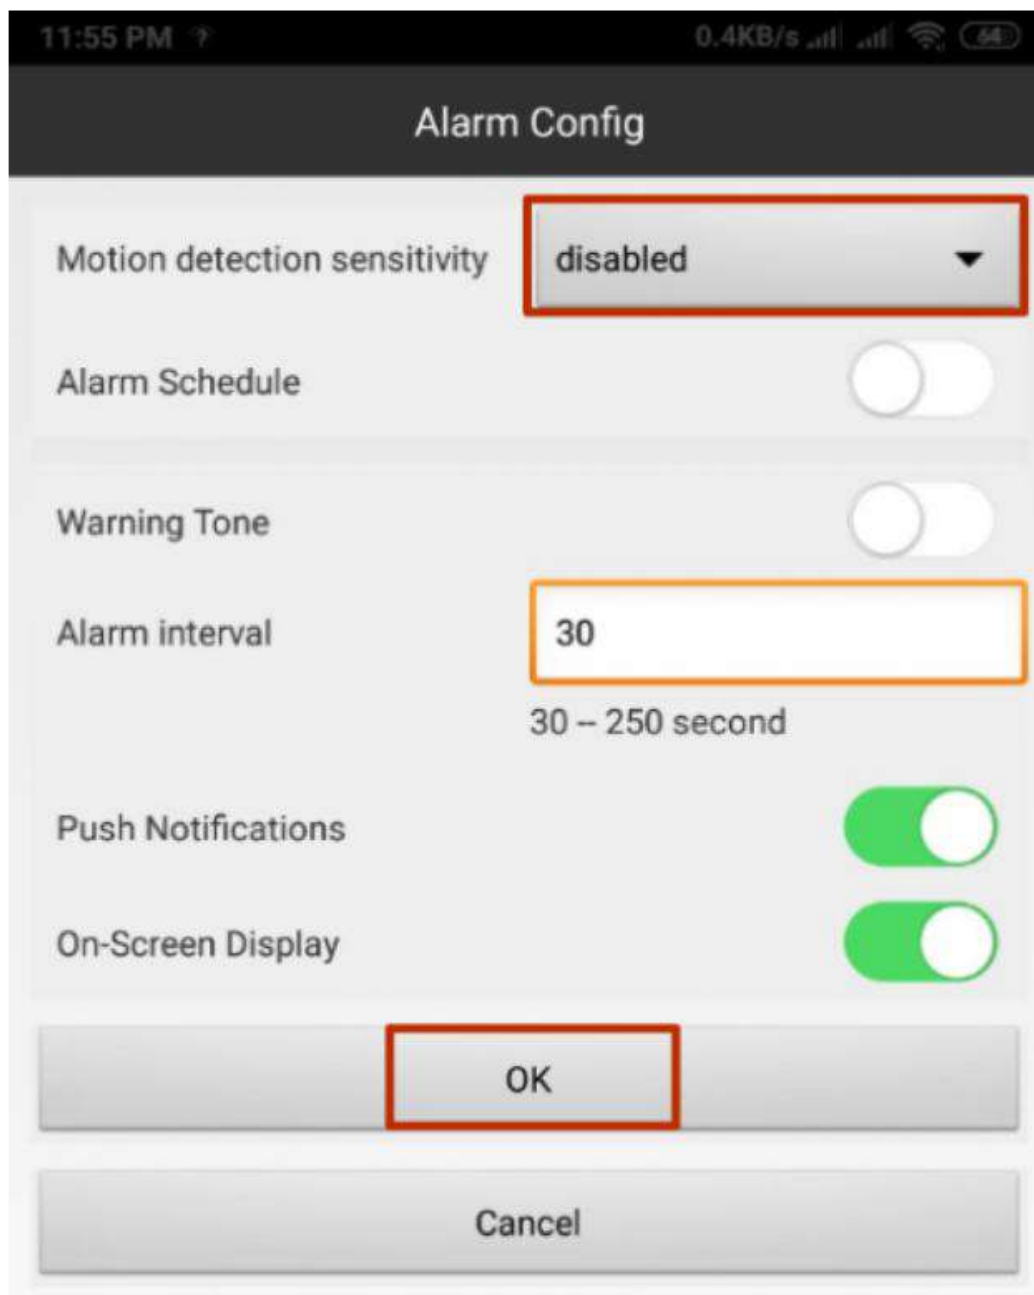

2. If these parameters are activated:

- Push Notifications.
- On-Screen Display.

You will receive notifications on your phone.

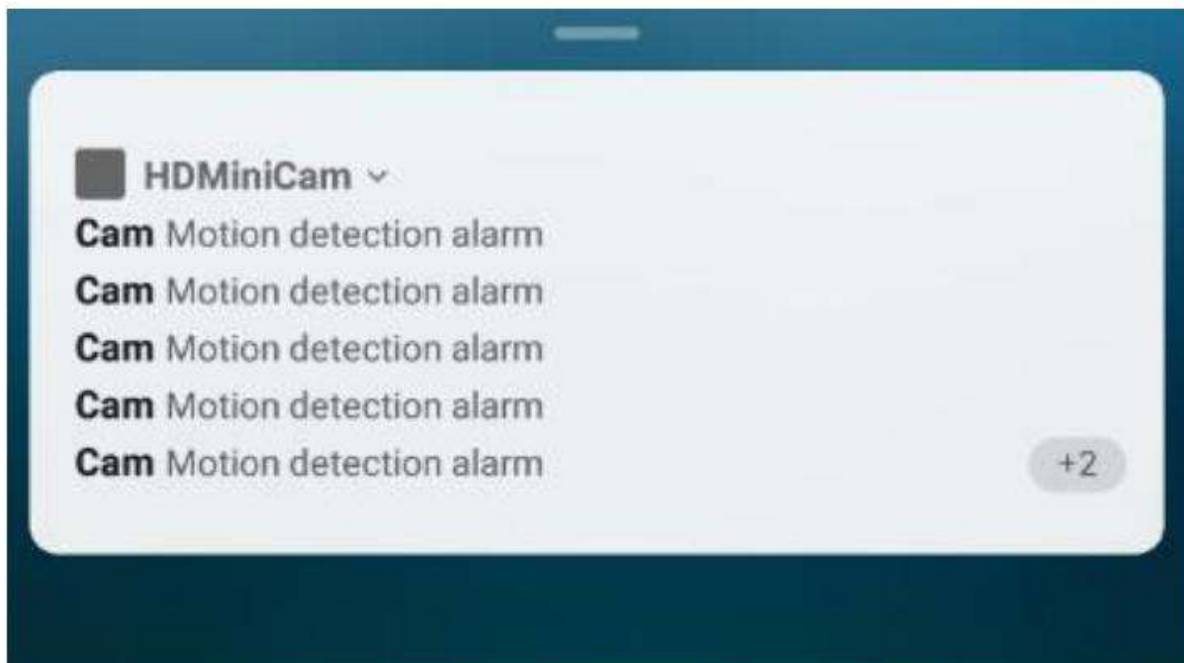


Ways of connection


iPhone / iPad

Way 1: Connect directly by Point to Point when the Smartphone is close to the camera.




1. After you turn on the device, connect to **Wi-Fi**.

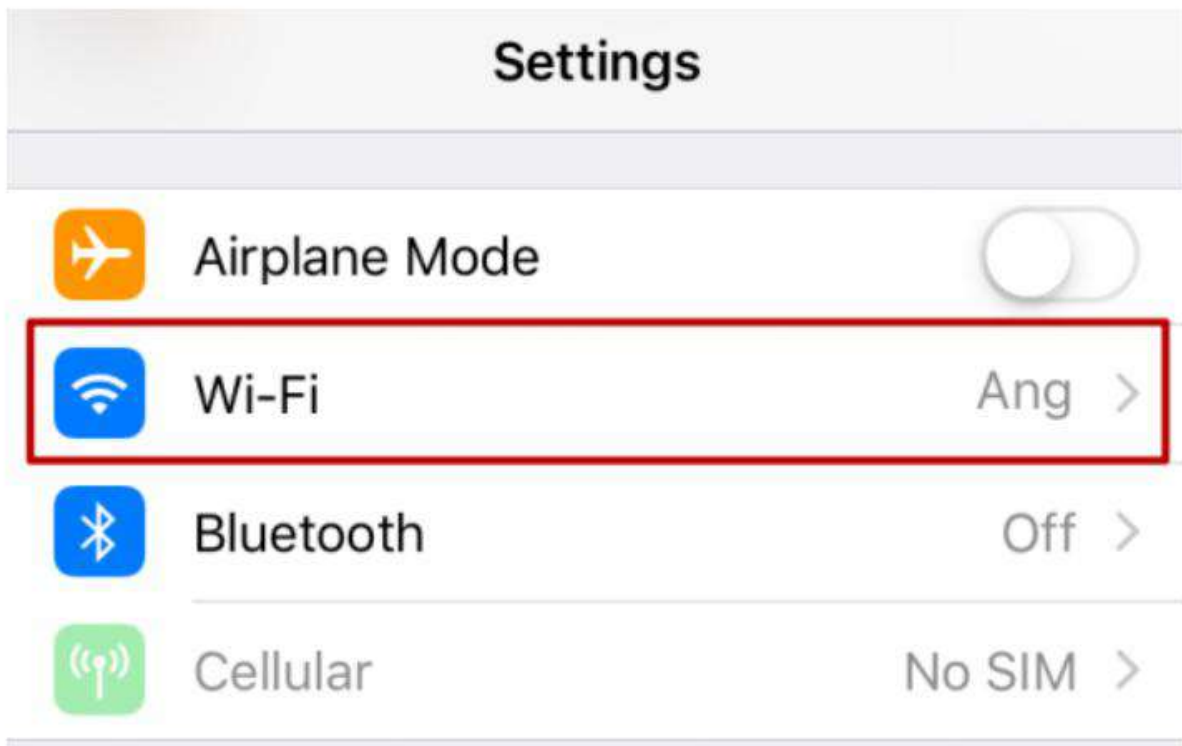


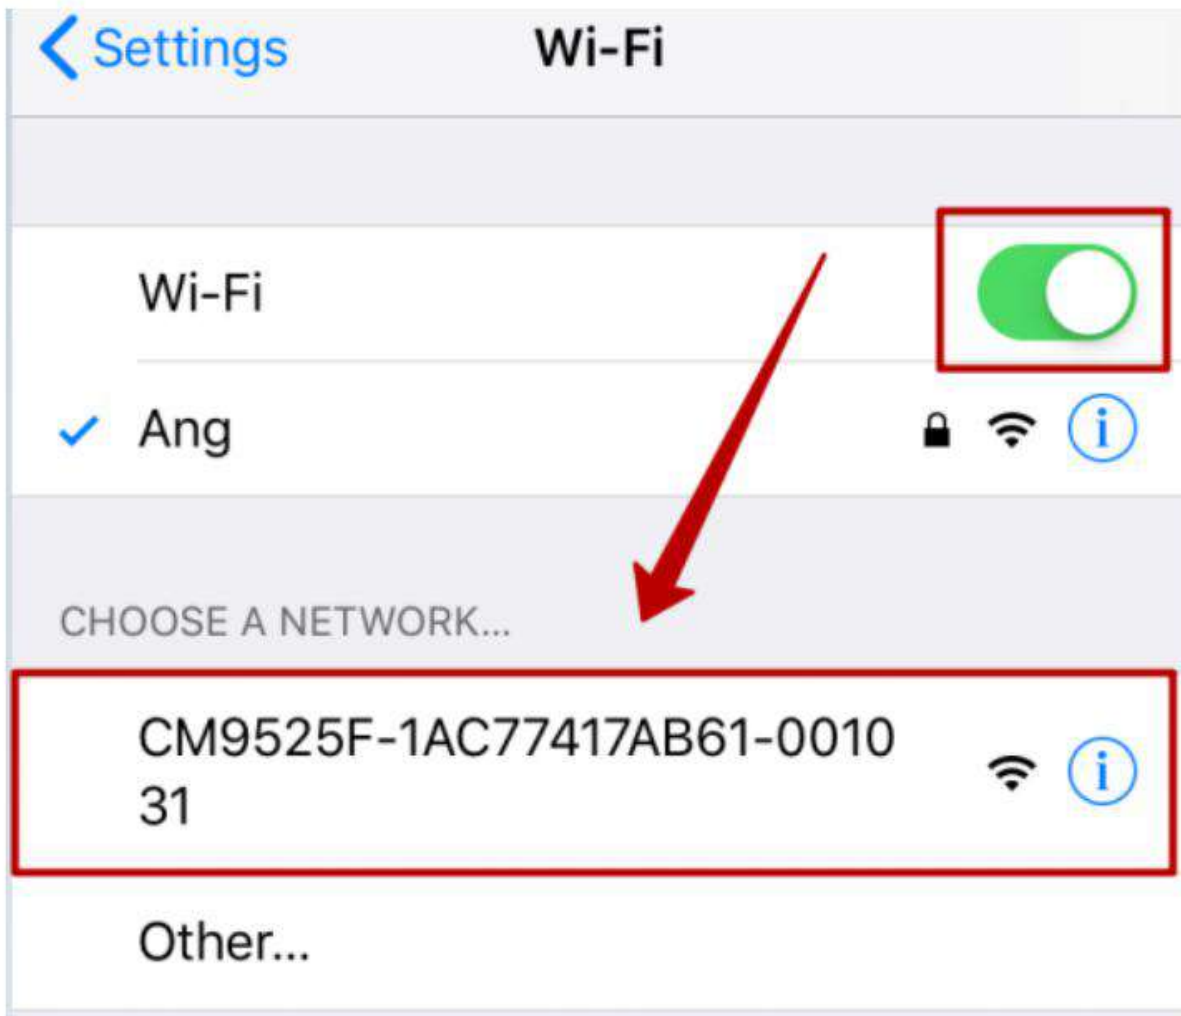


2. Open HDMiniCam PRO.

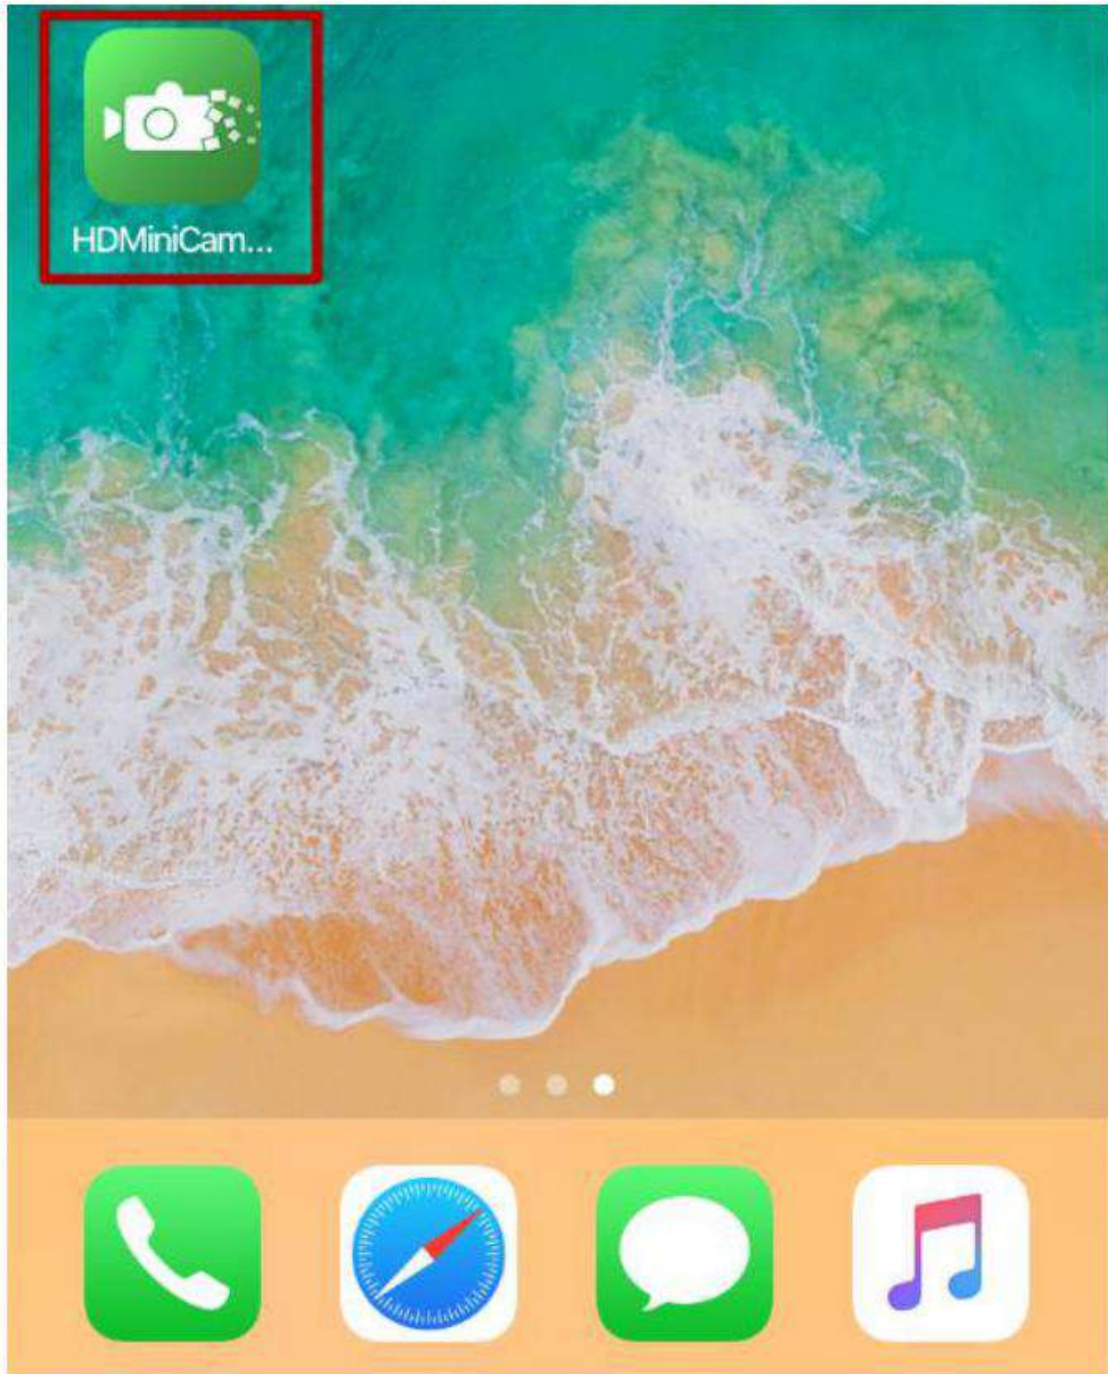

3. The program will automatically find your camera. Click "**OK**".

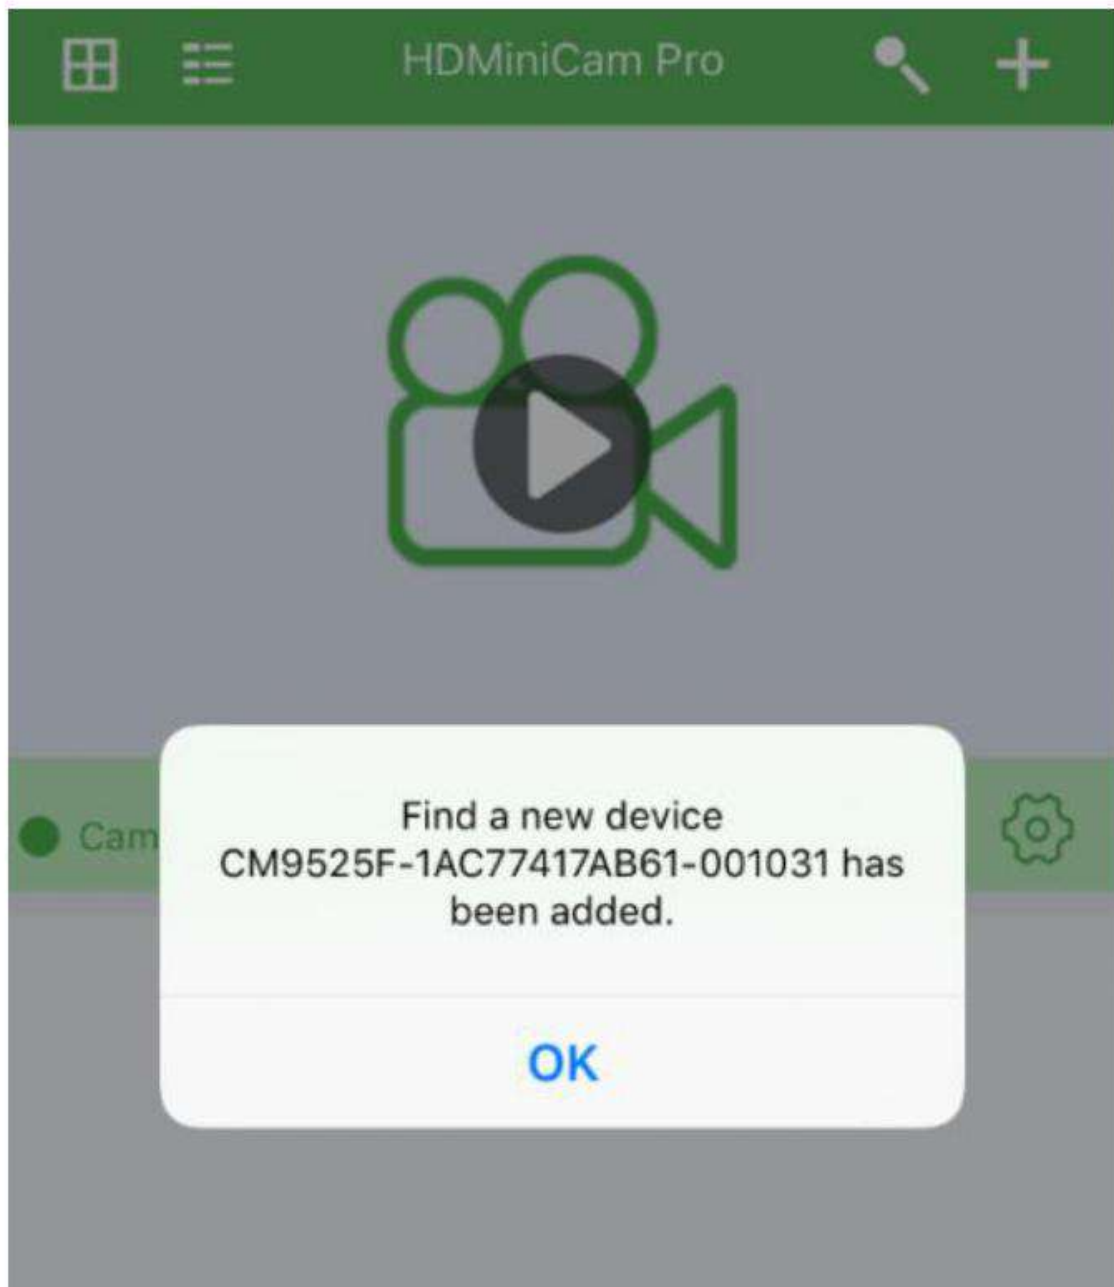

4. Click **“Play”**.

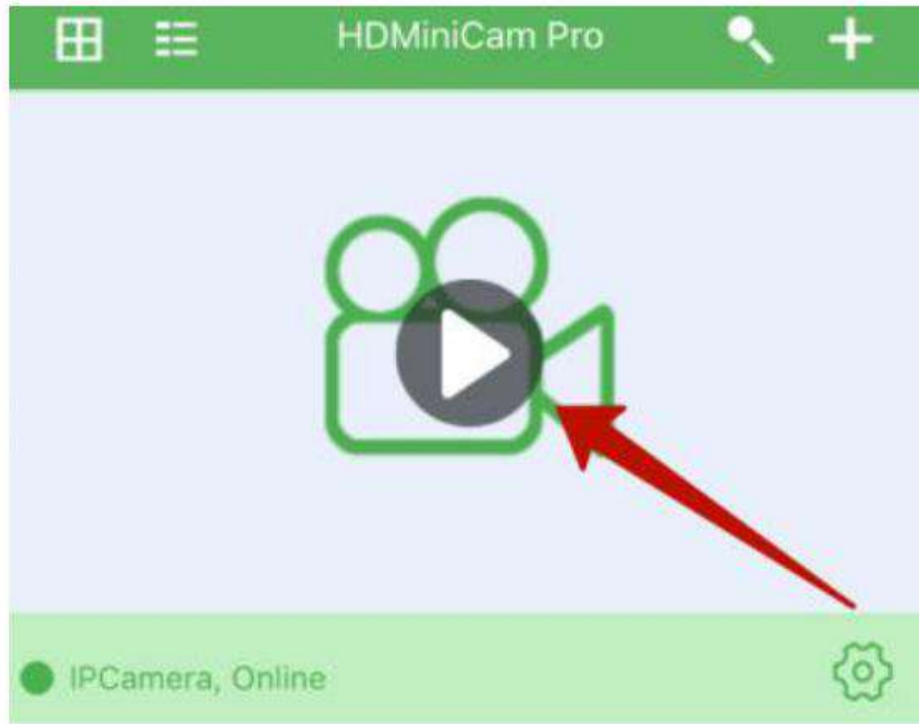


The camera is successfully configured!

Ways of connection


Way 2: Connect camera to Wireless Router: view real-time video anywhere.



1. Go to the settings.

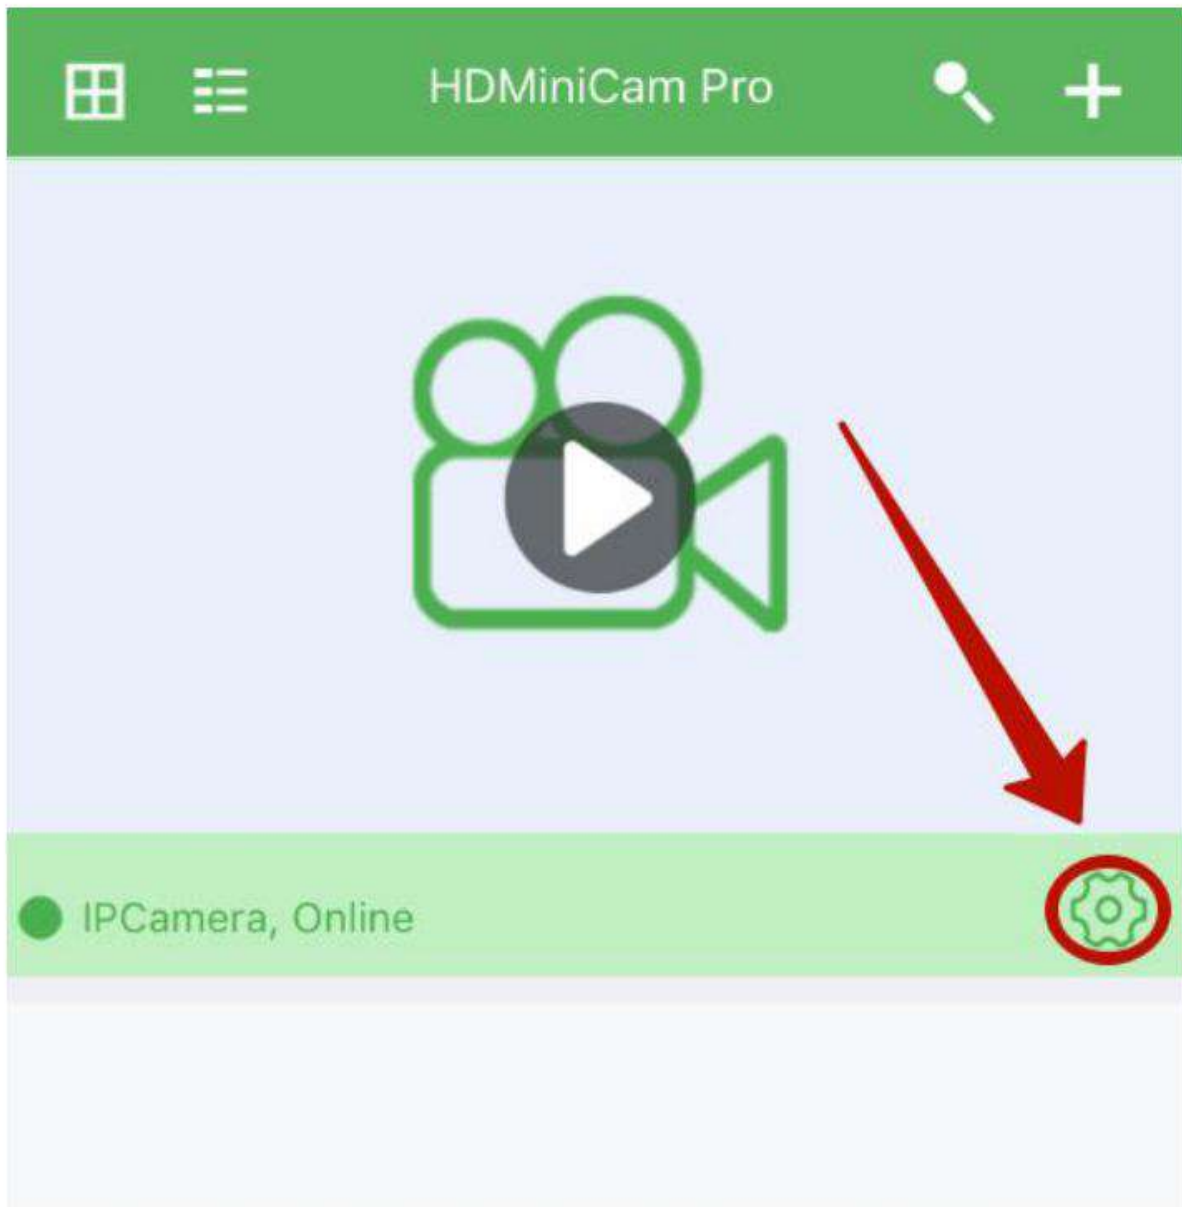

2. Click "Advance Config".

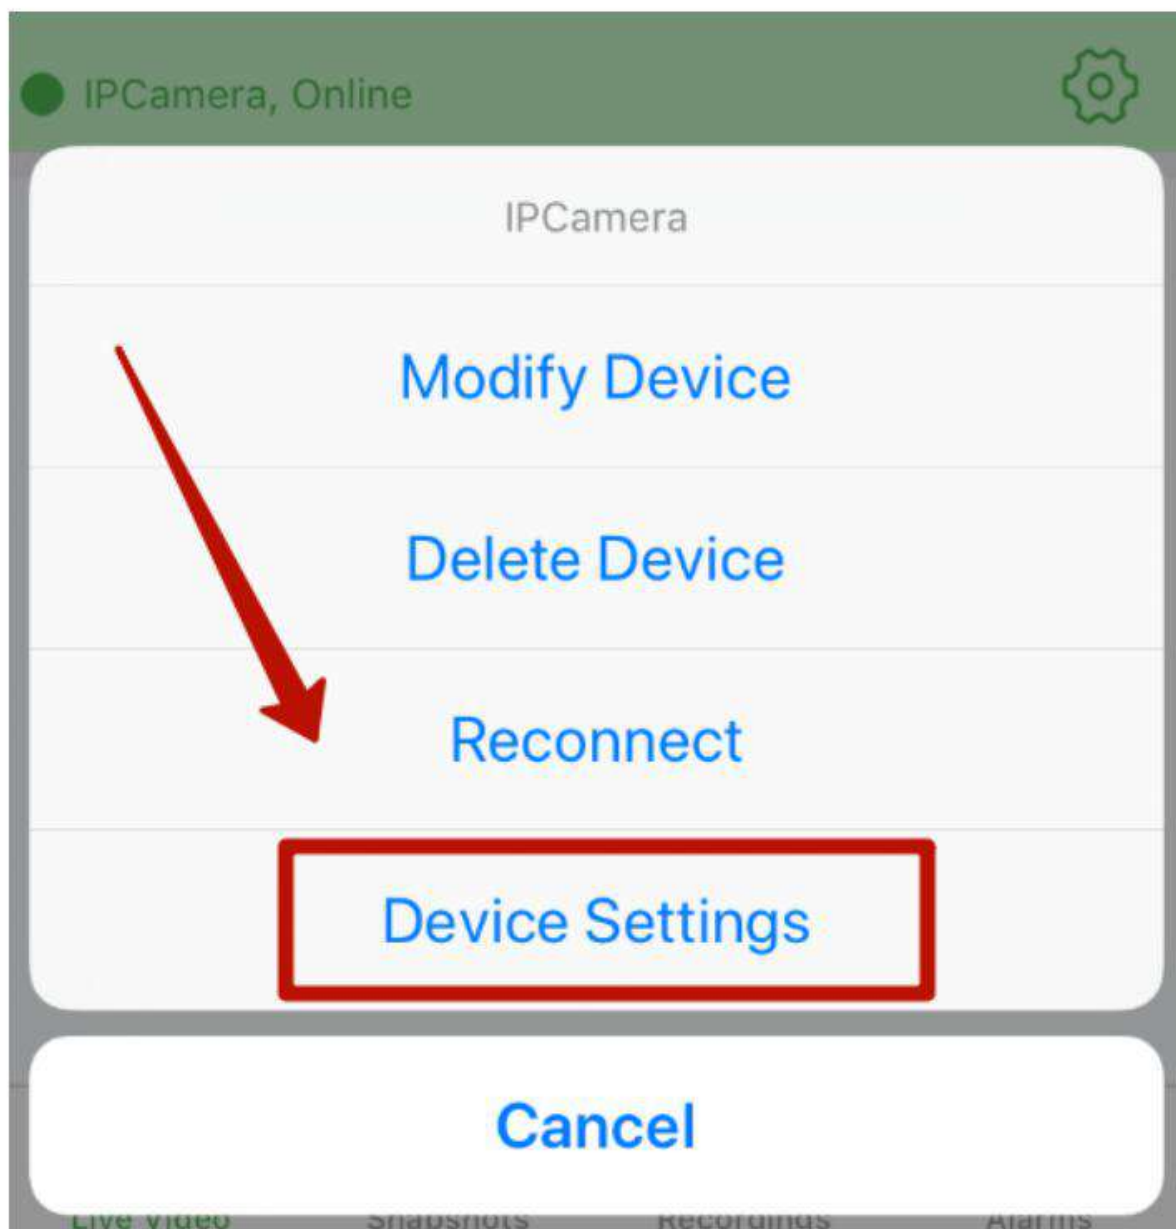

3. Click "Wi-Fi Config".



4. Choose Home Network from the list.




5. Enter your router password.



6. Turn off the camera by sliding the switch to OFF on the back panel of the watch. Then turn it ON again. You have restarted the camera! After that, wait for 5-10 minutes until the camera is set up and then connect to the mobile Internet of your phone for remote access.



7. If you have done everything correctly, then Cam Online will be displayed again in the HDMiniCam PRO program.

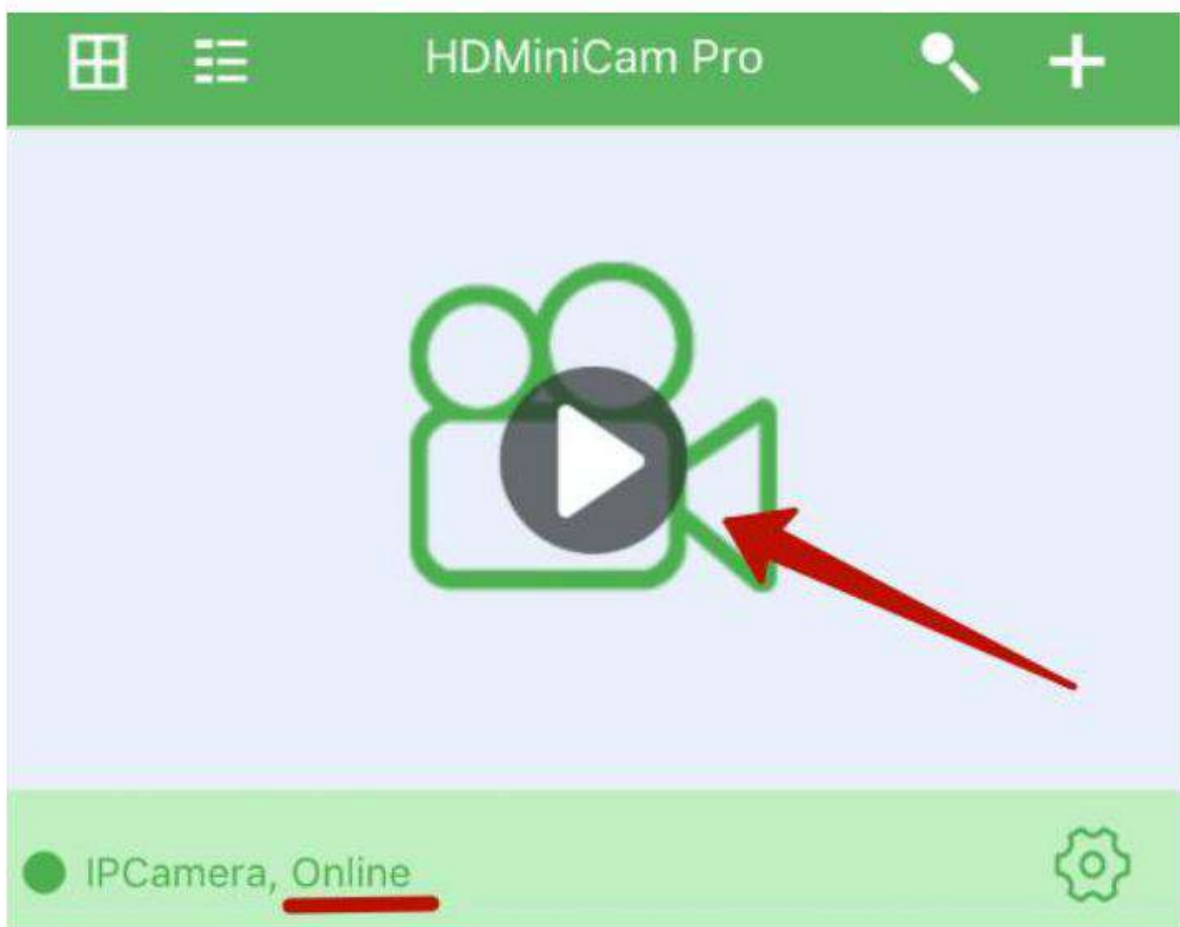


8. Open the camera. The connection will link up within a few minutes.

The camera is successfully configured!


PC Client Access Setting

Windows


1. Download file “PC Tools Download” from our site and open it

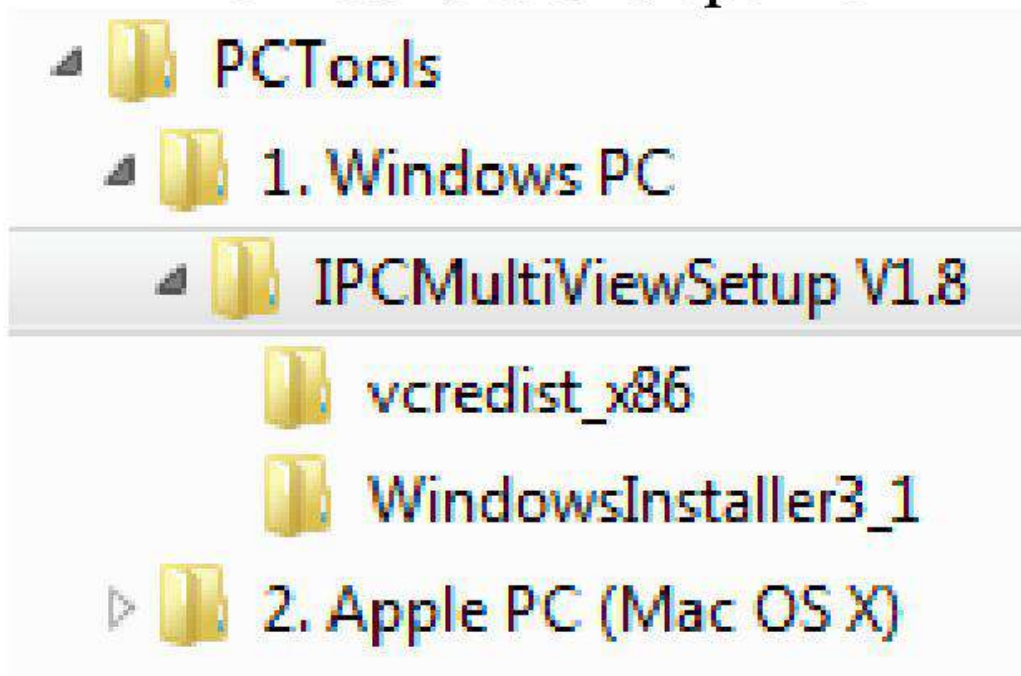


2. Run the file **IPCMultiViewSetup**

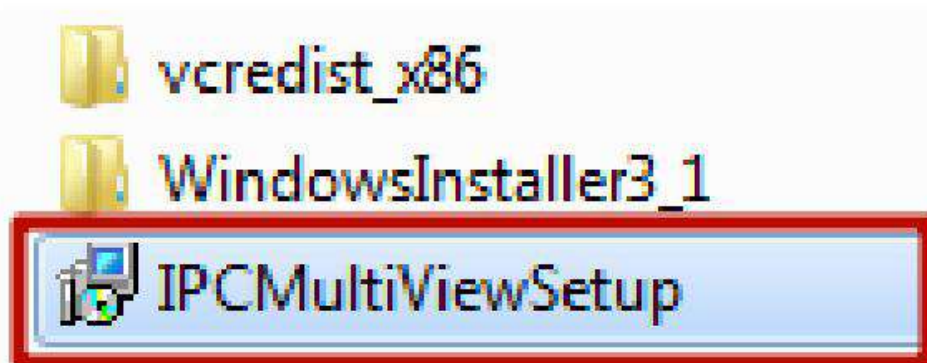


1. Next.

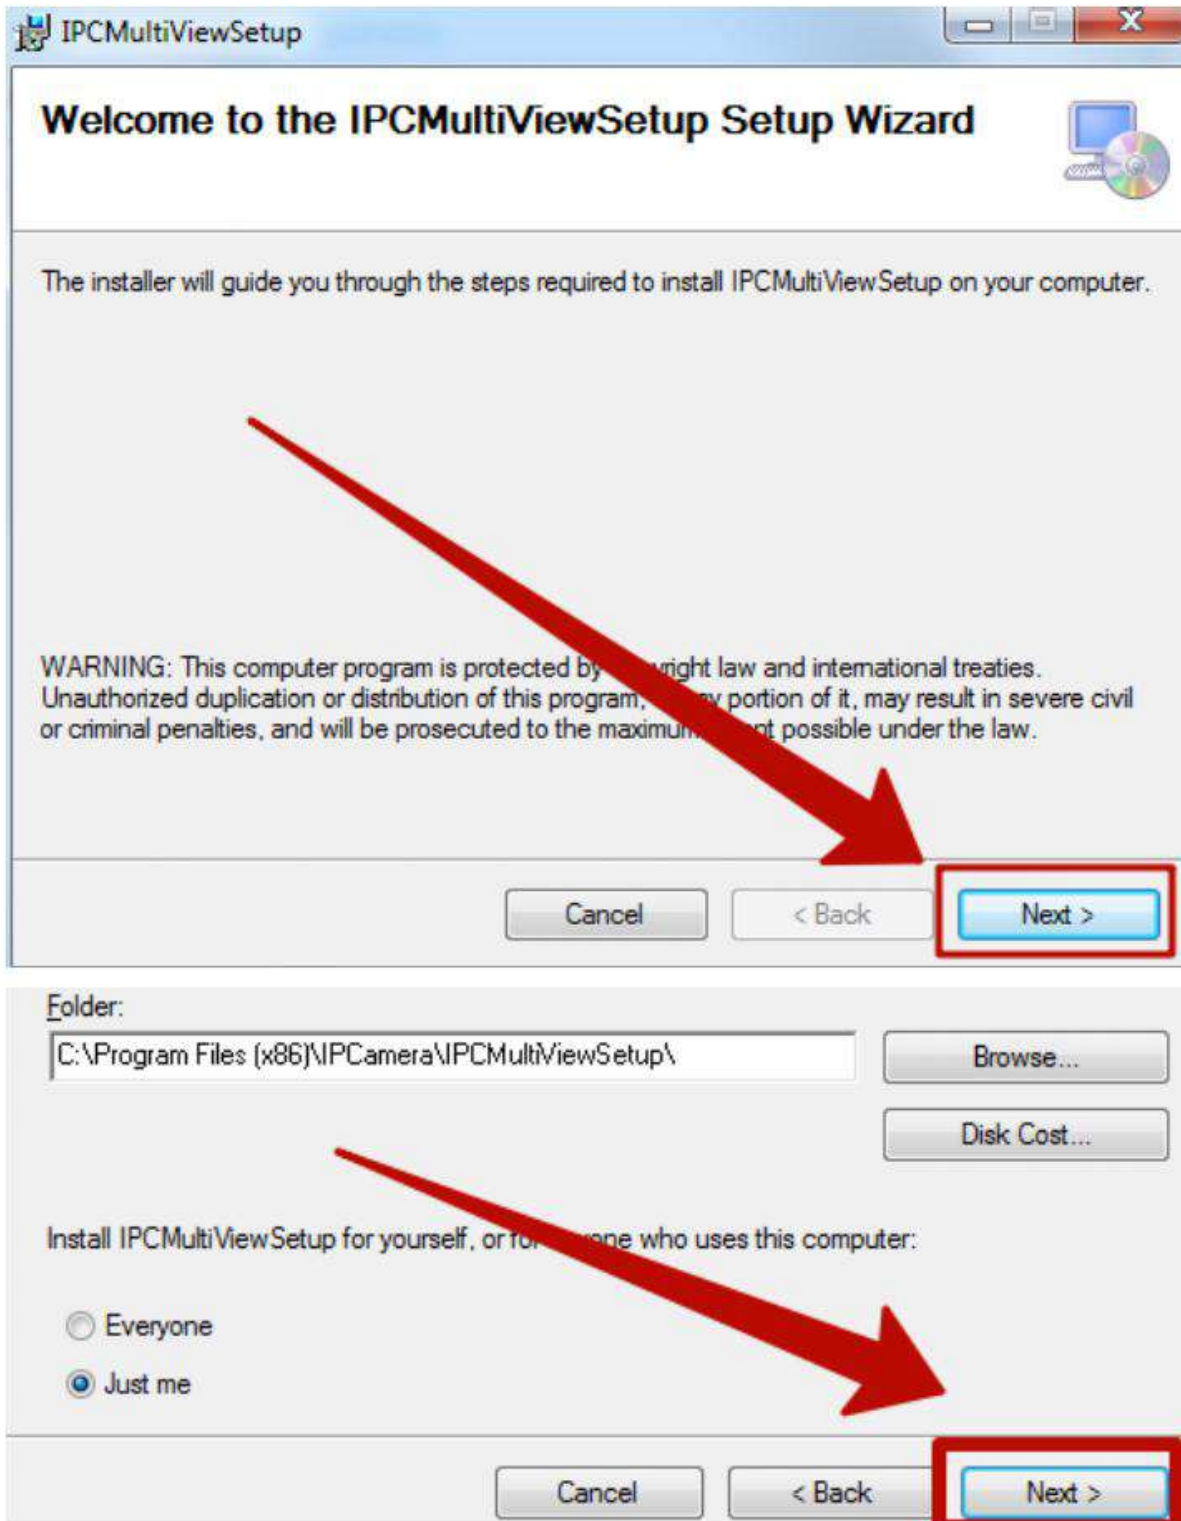


2. Next.

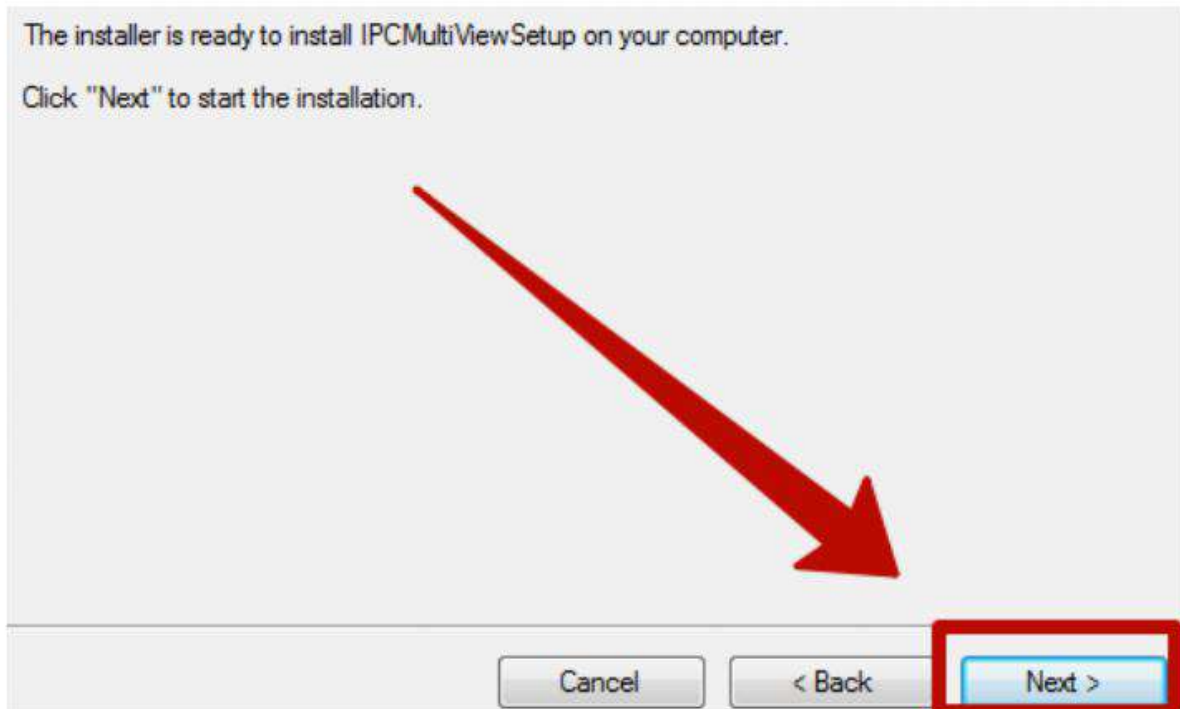


3. Close.

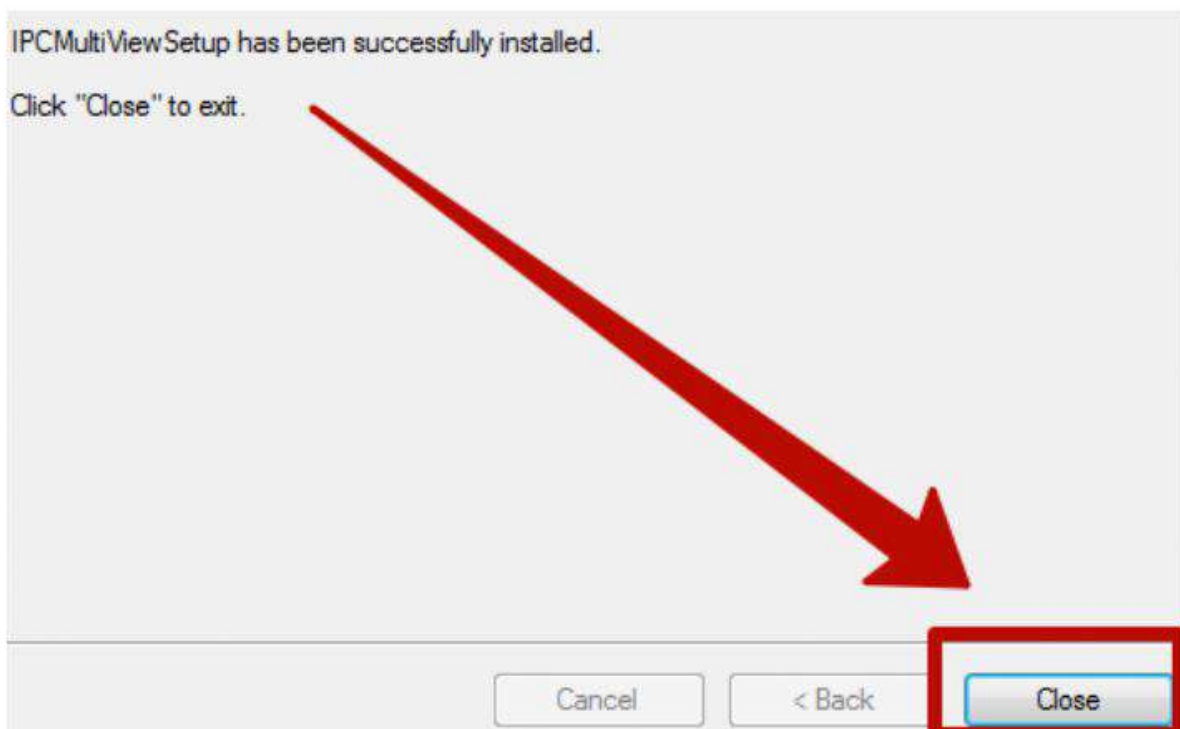

4. Activate IPCMultiView.

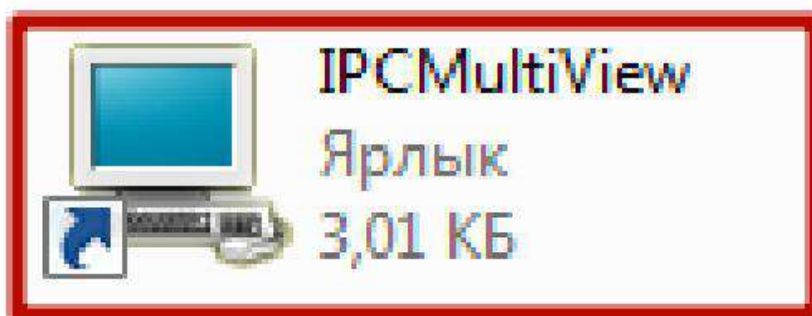


5. Fill in the fields.

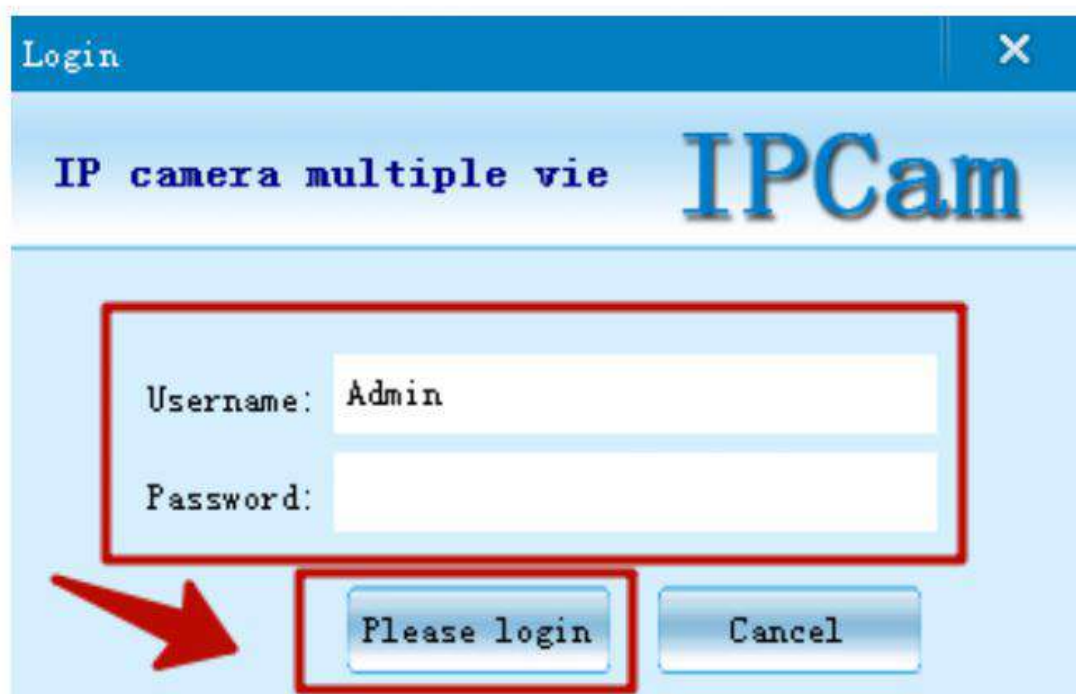

6. Add a new camera

+ Click on "**New IP camera**".

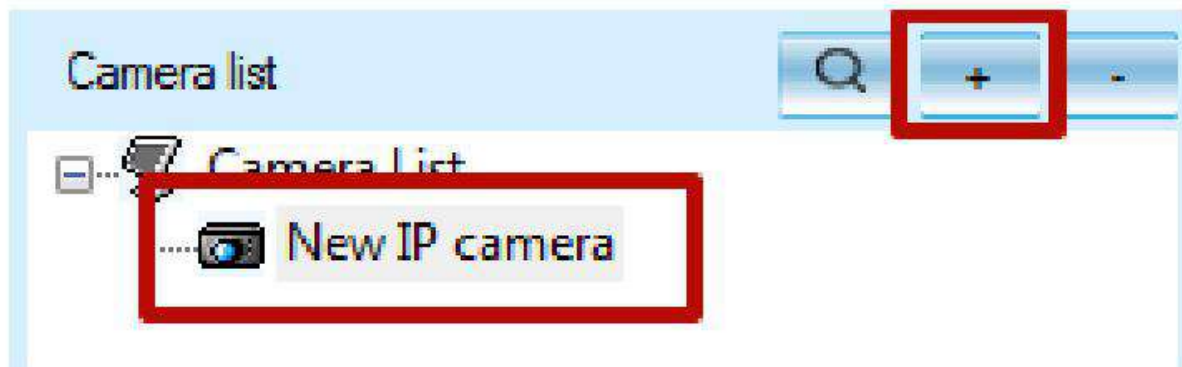


7. Fill in the fields.

Camera name:	New IP camera
UID:	CM9525F-1AC7417B61-00103
P2P password:	8888

8. Click "**OK**".




9. Double Click.

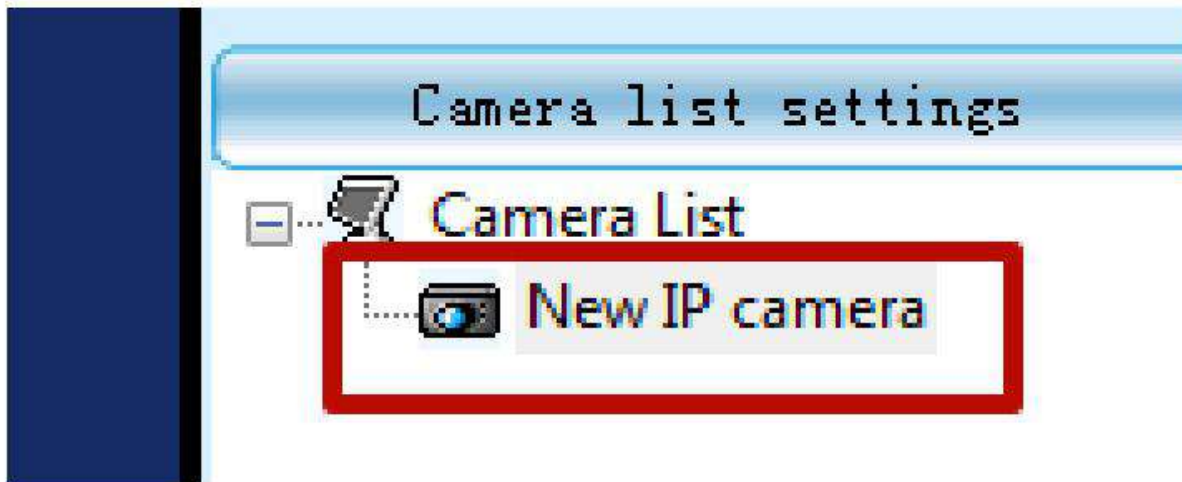

10. Click "OK".



11. Click on settings on the Upper right corner.

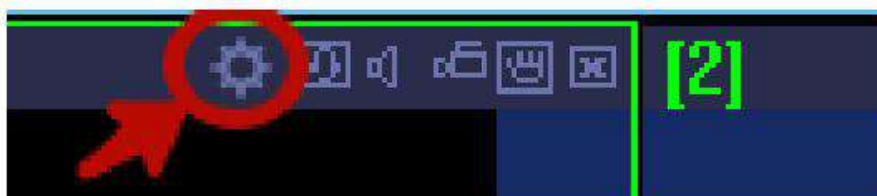

12. In the settings, set the time for Night Vision mode.



13. Click “OK”.

The camera is successfully configured!

Support:
clock.sirgawain@gmail.com

Mac OS Access Setting




On Mac OS, the camera works only in the wireless range of the Wi-Fi network.

- 1. Go to our website, download the program, IP Camera Search Tool.**
- 2. Turn on the camera, see Page 3.**

3. Link the camera to Wi-Fi.


CMXXXX-XXXXXXXXXXXX-XXXXXXXX.

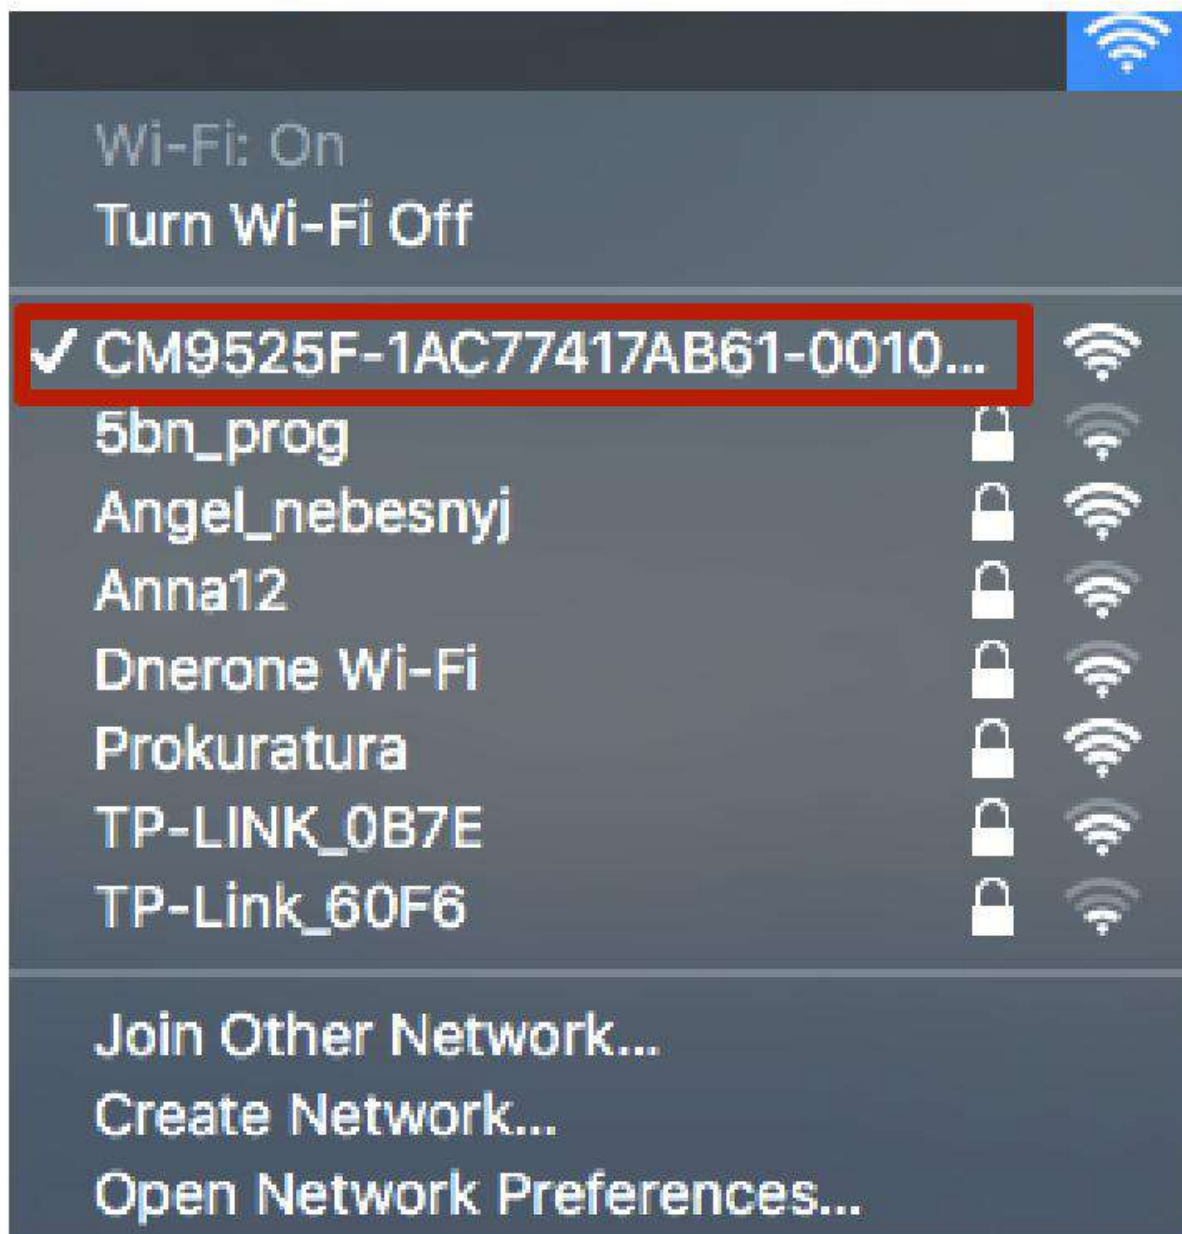


4. Open the downloaded program.




5. Click “Search”.

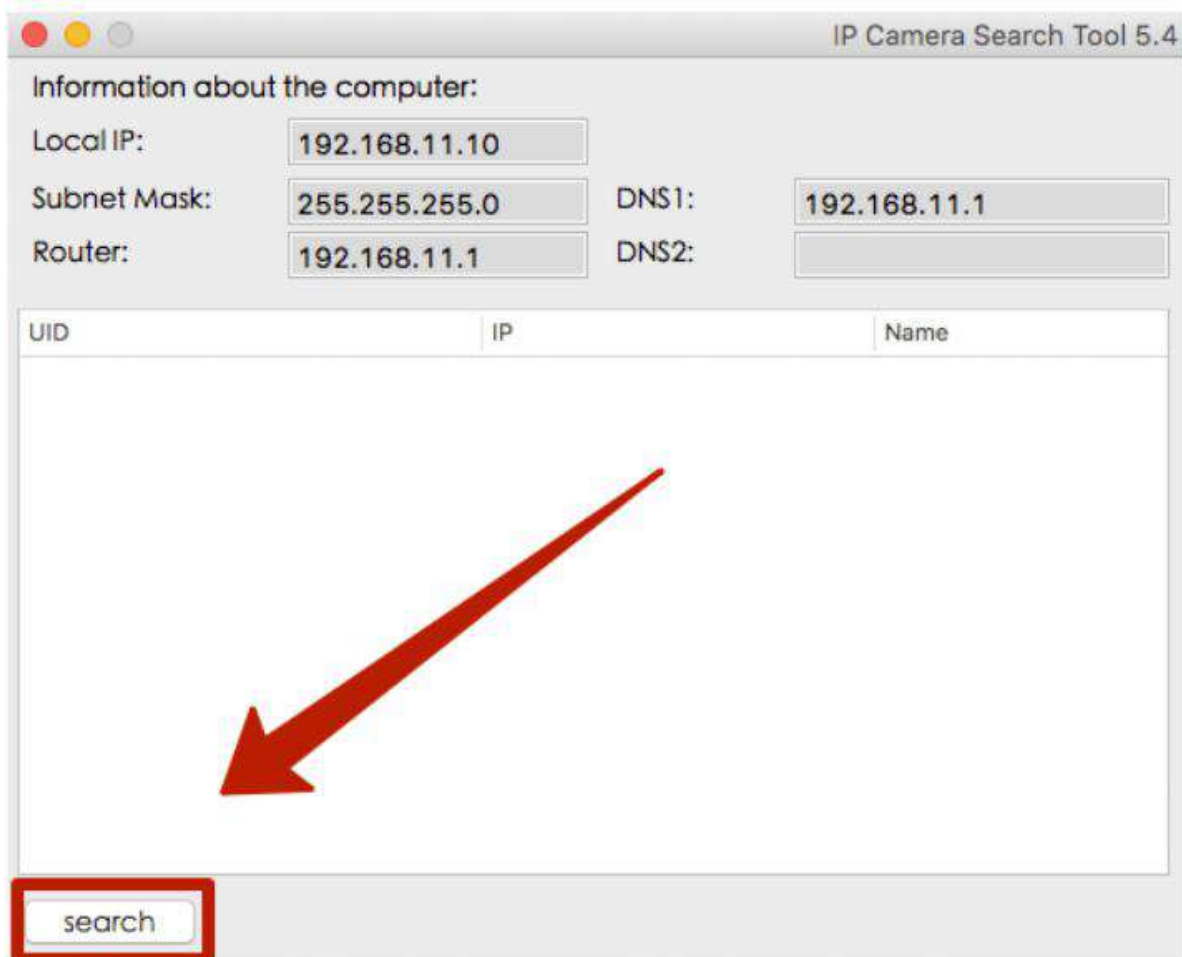

6. Select our camera and click “Open”.

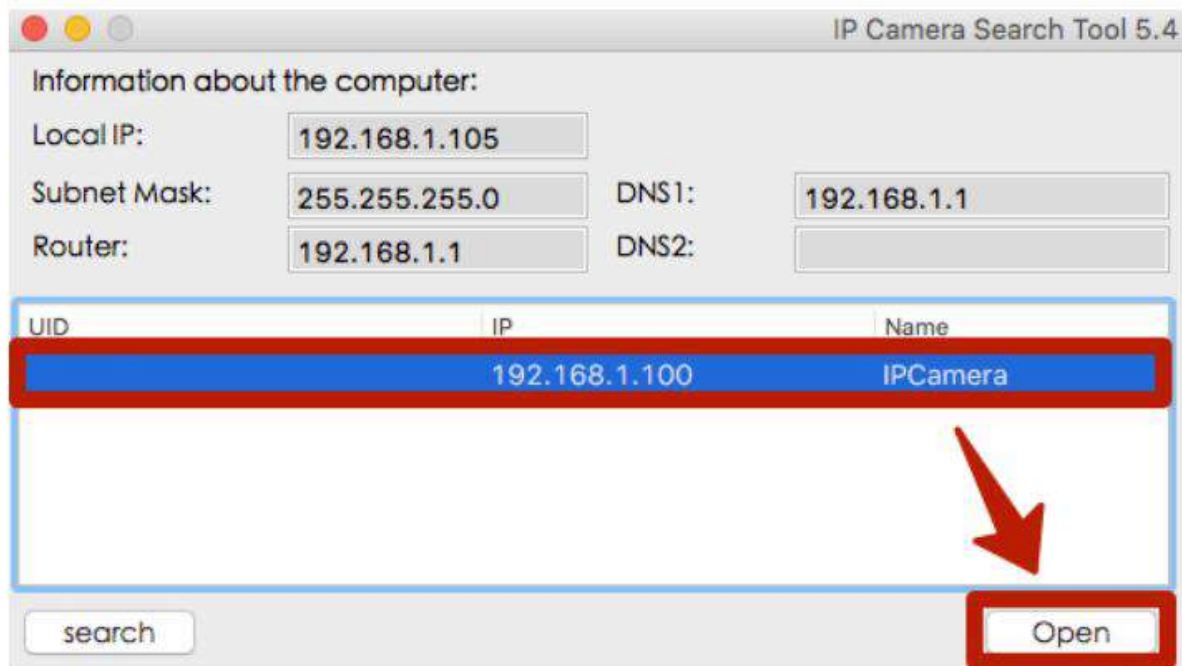

7. Enter the name: Admin password: empty.

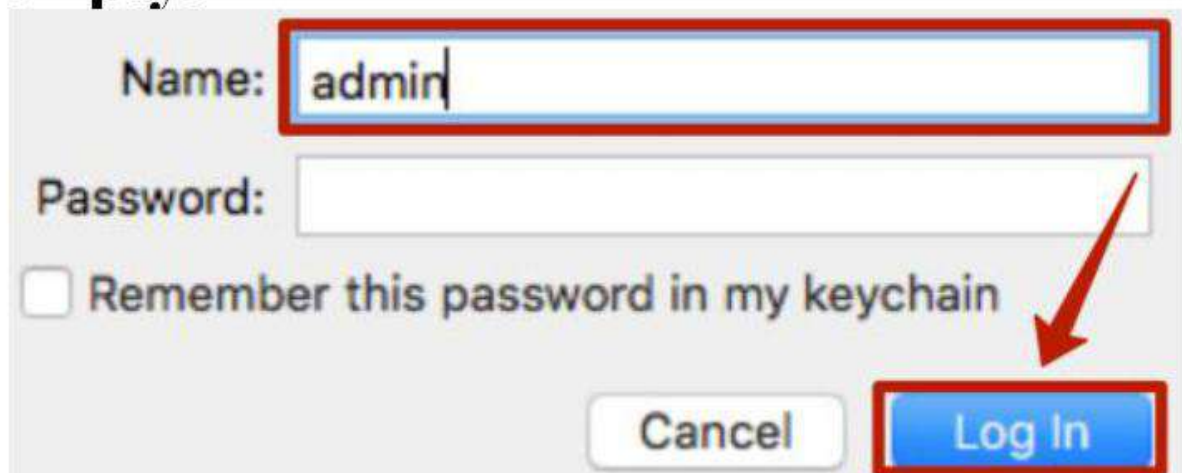

8. Choose Non-IE Web Browsers.

Welcome to Use IP Camera

 **Browser plug-ins**
Recommended browser plug-in, support for real-time video and audio playback, compatible with Windows platforms common browsers


 **Non-IE Web Browsers(MJPEG)**
For FireFox, Google Chrome, Safari etc.

 iPhone, iPod touch and iPad

9. Now in Wi-Fi mode, you can view the video.



10. Go to the settings.

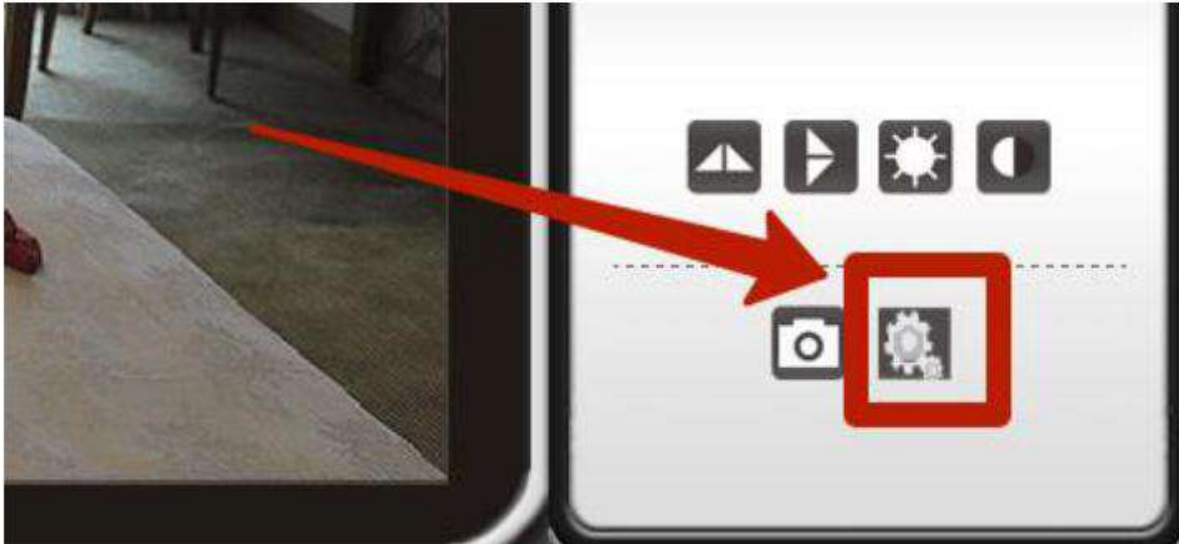

11. Network / Wi-Fi.



**12. Choose your home Wi-Fi network.
Click “Connect”.**



Enter your password and click “Apply”.



13. Reboot the camera.



Night vision can be customized only via the phone by setting the time you want it to be turned on!

The camera is successfully configured!

Support:
clock.sirgawain@gmail.com